

# Installing Cloudera Data Services on premises on the Cloudera Embedded Container Service

Date published: 2023-12-16

Date modified: 2024-12-20

# CLouDERA

# Legal Notice

© Cloudera Inc. 2025. All rights reserved.

The documentation is and contains Cloudera proprietary information protected by copyright and other intellectual property rights. No license under copyright or any other intellectual property right is granted herein.

Unless otherwise noted, scripts and sample code are licensed under the Apache License, Version 2.0.

Copyright information for Cloudera software may be found within the documentation accompanying each component in a particular release.

Cloudera software includes software from various open source or other third party projects, and may be released under the Apache Software License 2.0 (“ASLv2”), the Affero General Public License version 3 (AGPLv3), or other license terms. Other software included may be released under the terms of alternative open source licenses. Please review the license and notice files accompanying the software for additional licensing information.

Please visit the Cloudera software product page for more information on Cloudera software. For more information on Cloudera support services, please visit either the Support or Sales page. Feel free to contact us directly to discuss your specific needs.

Cloudera reserves the right to change any products at any time, and without notice. Cloudera assumes no responsibility nor liability arising from the use of products, except as expressly agreed to in writing by Cloudera.

Cloudera, Cloudera Altus, HUE, Impala, Cloudera Impala, and other Cloudera marks are registered or unregistered trademarks in the United States and other countries. All other trademarks are the property of their respective owners.

Disclaimer: EXCEPT AS EXPRESSLY PROVIDED IN A WRITTEN AGREEMENT WITH CLOUDERA, CLOUDERA DOES NOT MAKE NOR GIVE ANY REPRESENTATION, WARRANTY, NOR COVENANT OF ANY KIND, WHETHER EXPRESS OR IMPLIED, IN CONNECTION WITH CLOUDERA TECHNOLOGY OR RELATED SUPPORT PROVIDED IN CONNECTION THEREWITH. CLOUDERA DOES NOT WARRANT THAT CLOUDERA PRODUCTS NOR SOFTWARE WILL OPERATE UNINTERRUPTED NOR THAT IT WILL BE FREE FROM DEFECTS NOR ERRORS, THAT IT WILL PROTECT YOUR DATA FROM LOSS, CORRUPTION NOR UNAVAILABILITY, NOR THAT IT WILL MEET ALL OF CUSTOMER’S BUSINESS REQUIREMENTS. WITHOUT LIMITING THE FOREGOING, AND TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, CLOUDERA EXPRESSLY DISCLAIMS ANY AND ALL IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY, QUALITY, NON-INFRINGEMENT, TITLE, AND FITNESS FOR A PARTICULAR PURPOSE AND ANY REPRESENTATION, WARRANTY, OR COVENANT BASED ON COURSE OF DEALING OR USAGE IN TRADE.

# Contents

<b>Requirements.....</b>	<b>4</b>
Software Support Matrix for Cloudera Embedded Container Service.....	4
Cloudera Base on premises Software Requirements.....	5
Cloudera Data Services on premises Hardware Requirements.....	5
Requirements for HA and Non-HA Cloudera Control Plane.....	6
Additional resource requirements for Cloudera Data Warehouse.....	6
Additional resource requirements for Cloudera Data Engineering.....	6
Additional resource requirements for Cloudera AI.....	8
How to use the Cloudera Data Services on premises sizing spreadsheet.....	8
Docker repository access.....	11
Cloudera Data Services on premises Software Requirements.....	12
Requirements for Cloudera AI on Cloudera Embedded Container Service.....	13
Standard resource mode requirements.....	14
Prerequisites for Cloudera Data Engineering on premises.....	14
 <b>Installation using the Cloudera Embedded Container Service.....</b>	 <b>15</b>
Preparing Cloudera Base on premises.....	15
Cloudera Base on premises checklist.....	16
Cloudera Embedded Container Service checklist.....	17
Adding a Cloudera Data Services on premises cluster.....	18
Installing Cloudera Data Services on premises using Cloudera Embedded Container Service.....	19
ECS Server High Availability.....	45
Manually uninstalling ECS from a cluster.....	59

# Requirements

## Software Support Matrix for Cloudera Embedded Container Service

This support matrix lists the supported software for the Cloudera on premises cluster and the Cloudera Data Services on premises containerized cluster when installing using the Cloudera Embedded Container Service.

Base Cluster	Version	<ul style="list-style-type: none"> <li>Cloudera Manager 7.11.3 CHF 6</li> <li>7.1.9 CHF 6</li> <li>7.1.7 SP 3</li> <li>7.1.8 CHF 22</li> </ul>
	Base OS	<ul style="list-style-type: none"> <li>See <a href="#">Private Cloud Base OS requirements</a></li> </ul>
	TLS	<ul style="list-style-type: none"> <li>AutoTLS (Custom CMCA)</li> <li>AutoTLS (Self-signed)</li> </ul>
	Kerberos	<ul style="list-style-type: none"> <li>AD</li> <li>FreeIPA</li> </ul>
	JDK	<ul style="list-style-type: none"> <li>See <a href="#">Java Requirements</a></li> </ul>
	Custom service principals	<ul style="list-style-type: none"> <li>Not supported</li> </ul>
	Data Lake Storage	<ul style="list-style-type: none"> <li>HDFS</li> <li>Ozone</li> <li>Iceberg v2 (with HDFS and Ozone)</li> </ul>
	Base DB (HMS access from CDW Data Services)	<ul style="list-style-type: none"> <li>MySQL 5.7, 8.0</li> <li>Maria DB 10.2, 10.3, 10.4, 10.5, 10.6</li> <li>Oracle 19.19. 19c</li> <li>Postgres 12, 13, 14</li> </ul>
Containerized Cluster	ECS OS	<ul style="list-style-type: none"> <li>OEL (RHCK Kernel Only) 8.7, 8.8, 8.9, 9.1, 9.2, 9.3</li> <li>RHEL 8.7, 8.8, 8.9, 8.10, 9.1, 9.2, 9.3, 9.4</li> </ul>
	Control Plane Metadata DB	<ul style="list-style-type: none"> <li>Embedded</li> </ul>
	Vault	<ul style="list-style-type: none"> <li>Embedded</li> </ul>
	Docker registry type	<ul style="list-style-type: none"> <li>Secure registry with self signed CA certs (pwd protected + self signed certs)</li> <li>Embedded (Cloudera Embedded Container Service only. Not recommended)</li> </ul>
	NFS	<ul style="list-style-type: none"> <li>Embedded</li> <li>External</li> </ul>
	IdP	<ul style="list-style-type: none"> <li>FreeIPA</li> <li>ActiveDirectory (LDAP)</li> <li>OpenLDAPs</li> </ul>
	Network Access	<ul style="list-style-type: none"> <li>Airgap</li> <li>Internet</li> <li>HTTP proxy (Cloudera AI)</li> </ul>

	TLS	<ul style="list-style-type: none"> <li>Manual - CA signed</li> <li>ESC server signed (Cloudera Embedded Container Service only)</li> </ul>
GPU Nodes	OS	<ul style="list-style-type: none"> <li>RHEL 8.7, 8.8, 8.9, 8.10, 9.1, 9.2, 9.3, 9.4</li> </ul>

## Cloudera Base on premises Software Requirements

The software requirements for the nodes on which Cloudera Data Services on premises are deployed are identical to Cloudera Base on premises.

Your Cloudera Base on premises cluster must have the operating system, JDK, database, Cloudera components, and Cloudera Runtime version compatible with Cloudera Data Services on premises. You must first set up the Cloudera Base on premises cluster, then you can install the on premises Containerized cluster.

For more information about the requirements for the Cloudera Base on premises cluster, see the Cloudera Base on premises section of the [Requirements and Supported Versions](#) and the Cloudera Base on premises section of the [Software Support Matrix for Cloudera Embedded Container Service](#) on page 4.

The following Cloudera Base on premises cluster services are required to fully access the Data Services:

- Zookeeper
- HBase
- Hive Metastore (HMS)
- Hive on Tez (needed for using compaction)
- Ranger
- Atlas
- HDFS
- Ozone
- YARN
- Kafka
- Solr

In addition to this, the hive user should be able to create and list an Ozone bucket. For information about creating and listing ozone bucket, see *Managing buckets*.



**Note:**

Ozone is not a mandatory requirement for installing Cloudera AI without the model registry.

### Related Information

[Managing buckets](#)

## Cloudera Data Services on premises Hardware Requirements

Minimum and recommended hardware to successfully install and run Cloudera Data Services on premises.

In addition to the resources required for the Cloudera Control Plane, additional resources will be required depending on the Data Service(s) you intend to run. Minimum and recommended additional resource requirements for each of the Data Services can be found in the pages below. To calculate the total minimum or recommended resource requirements for your Cloudera Data Services on premises cluster, add the resources required for the Control Plane to the total minimum or recommended additional resources for your chosen Data Service(s).

You can also use the Cloudera Data Services on premises Spreadsheet to model the number and specification of hosts required for a deployment. See [How to use the Cloudera Data Services on premises sizing spreadsheet](#) on page 8.

## Requirements for HA and Non-HA Cloudera Control Plane

Standard resource mode requirements for standalone HA and Non-HA Cloudera Control Plane.

Component	Minimum	Recommended
Node Count	1 (Non-HA)	3 (HA)
CPU	16 cores	32 cores (per node)
Memory	32 GB	64 GB (per node)
Storage	300 GB	1 TB (per node)
Network Bandwidth	1GB/s to all nodes and base cluster	1GB/s to all nodes and base cluster

## Additional resource requirements for Cloudera Data Warehouse

Standard resource mode requirements for Cloudera Data Warehouse.

The following table lists the minimum and recommended compute (processor), memory, storage, and network bandwidth required for each OpenShift or worker node using the Standard Resource Mode for production use case. Note that the actual node still needs some extra resources to run the operating system, Kubernetes engine, and agent on .

Component	Minimum	Recommended
Node Count	4	10
CPU per worker	16 cores [or 8 cores or 16 threads that have Simultaneous Multithreading (SMT) enabled]	32+ cores (can also be achieved by enabling SMT)
Memory per worker	128 GB per node	384 GB* per node
FAST (Fully Automated Storage Tiering) Cache - Locally attached SCSI device(s) on every worker. Preferred: NVMe and SSD. OCP uses Local Storage Operator. ECS uses Local Path Provisioner.	1.2 TB* SATA, SSD per host	1.2 TB* NVMe/SSD per host
Network Bandwidth	1 GB/s guaranteed bandwidth to every	10 GB/s guaranteed bandwidth to every node



**Important:** When you add memory and storage, it is very important that you add it in the increments as follows:

- Increments of 128 GB of memory
- Increments of 600 GB of locally attached SSD/NVMe storage

If you add memory or storage that is not in the above increments, the memory and storage that exceeds these increments is not used for executor pods. Instead, the extra memory and storage can be used by other pods that require fewer resources.

For example, if you add 200 GB of memory, only 128 GB is used by the executor pods. If you add 2 TB of locally attached storage, only 1.8 TB is used by the executor pods.

## Additional resource requirements for Cloudera Data Engineering

For standalone Cloudera Data Engineering, Cloudera recommends three nodes (one master and two workers) with the following minimum memory, storage, and hardware requirements for each node:

\* Depending on the number of executors you want to run on each physical node, the per-node requirements change proportionally. For example, if you are running 3 executor pods per physical node, you require 384 GB of memory and approximately 1.8TB (600GB per executor) of locally attached SSD/NVMe storage for FAST Cache.

Component	Minimum	Recommended
Node Count	2	4
CPU	16 cores for CDE workspace (base and virtual cluster) and 8 cores for workload	16 cores for CDE workspace (base and virtual cluster) and 32 cores (you can extend this depending upon the workload size)
Memory	64 GB for CDE workspace (base and virtual cluster) and 32 GB (you can extend this depending upon the workload size)	64 GB for CDE workspace (base and virtual cluster) and 64 GB (you can extend this depending upon the workload size)
Storage	200 GB block storage and 500 GB NFS storage	200 GB block storage and 500 GB NFS storage
Network Bandwidth	1 GB/s to all nodes and base cluster	10 GB/s to all nodes and base cluster



**Important:** Optionally, if you want to use GPU in Spark, the Spark RAPIDS library is validated and certified by Nvidia for *NVIDIA P100, V100, T4 and A2/A10/A30/A100* GPU architecture.

### Cloudera Data Engineering Service and Virtual Cluster requirements

- Cloudera Data Engineering Service requirements: Overall for a Cloudera Data Engineering service, it requires 110 GB Block PV or NFS PV, 7 CPU cores, and 15 GB memory.

**Table 1: The following are the Cloudera Data Engineering Service requirements:**

Component	vCPU	Memory	Block PV or NFS PV	Number of replicas
Embedded DB	4	8 GB	100 GB	1
Config Manager	500 m	1 GB	--	2
Dex Downloads	250 m	512 MB	--	1
Knox	250 m	1 GB	--	1
Management API	1	2 GB	--	1
NGINX Ingress Controller	100 m	90 MB	--	1
FluentD Forwarder	250 m	512 MB	--	1
Grafana	250 m	512 MB	10 GB	1
Data Connector	250 m	512 MB	--	1
Total	7	15 GB	110 GB	

- Cloudera Data Engineering Virtual Cluster requirements:
  - For Spark 3: Overall storage of 400 GB Block PV or Shared Storage PV, 5.35 CPU cores, and 15.6 GB per virtual cluster.
  - For Spark 2: If you are using Spark 2, you need additional 500 m CPU, 4.5 GB memory and 100 GB storage, that is, the overall storage of 500 GB Block PV or Shared Storage PV, 5.85 CPU cores, and 20.1 GB per virtual cluster.



**Important:** The Cloudera Data Engineering service and virtual cluster requirements does not include workloads. See the below workload information on the additional resources based on workload.

**Table 2: The following are the Cloudera Data Engineering Virtual Cluster requirements for Spark 3:**

Component	vCPU	Memory	Block PV or NFS PV	Number of replicas
Airflow API	350 m	612 MB	100 GB	1

Component	vCPU	Memory	Block PV or NFS PV	Number of replicas
Airflow Scheduler	1	1 GB	100 GB	1
Airflow Web	250 m	512 MB	--	1
Runtime API	250 m	512 MB	100 GB	1
Livy	3	12 GB	100 GB	1
SHS	250 m	1 GB		1
Pipelines	250 m	512 MB	--	1
Total	5350 m	15.6 GB	400 GB	

- Workloads: Depending upon the workload, you must configure resources.
  - The Spark Driver container uses resources based on the configured driver cores and driver memory and additional 40% memory overhead.
  - In addition to this, Spark Driver uses 110 m CPU and 232 MB for the sidecar container.
  - The Spark Executor container uses resources based on the configured executor cores and executor memory and additional 40 % memory overhead.
  - In addition to this, Spark Executor uses 10 m CPU and 32 MB for the sidecar container.
  - Minimal Airflow jobs need 100 m CPU and 200 MB memory per Airflow worker.

## Additional resource requirements for Cloudera AI

Standard resource mode requirements for standalone Cloudera AI. Node count should not be a limiting factor assuming the other memory and CPU minimums are reached.

Component	Minimum	Recommended
Node Count	1	1 per workspace + additional nodes depending on expected user workloads
CPU	32 Cores Per Workspace+ additional Cores depending on expected user workloads	32 Cores Per workspace + additional Cores depending on expected user workloads
Memory	128 GB + additional memory depending on the expected workloads	256 GB Per Workspace + additional memory depending on the expected workloads
Storage	Set up ECS/Longhorn with SSDs with a minimum of 600 GB and recommended cumulative 4500 GB of Block storage for project use. For Production environments, it is strongly recommended to setup an External NFS environment with at least 1000 GB of NFS storage with additional Block storage based on project file sizing.	
Network Bandwidth	1GB/s to all nodes and base cluster	1GB/s to all nodes and base cluster

Additional Resources for User Workloads:

Component	Minimum	Recommended
CPU	1 Core per concurrent workload	2–16 cores per concurrent workload (dependent on use cases)
Memory	2 GB per concurrent workload	4–64 GB per concurrent workload (dependent on use cases)

## How to use the Cloudera Data Services on premises sizing spreadsheet

You can use the sizing spreadsheet to model the hardware requirements for a Cloudera Data Services on premises deployment.

### Overview

The Cloudera Data Services on premises Sizing spreadsheet is a spreadsheet that you can use to model the quantity and specifications for worker hosts required in a Cloudera Data Services on premises deployment.



This spreadsheet is intended to use information about workloads you are planning to run and hardware specifications for worker nodes to arrive at an approximate number of worker nodes required for your deployment. Due to the complexity of estimating workloads, Cloudera recommends you review any sizing or purchasing decisions with Cloudera Professional Services before committing to those decisions.

### How to access the spreadsheet

You can access the spreadsheet here: [Cloudera Private Cloud Data Services Sizing](#). The file is in Microsoft Excel format. You can open the file in Excel, or upload it to Google Sheets.

There are three tabs in the spreadsheet. You will make your inputs only on the Worker Node Totals tab. Do not modify the following tabs (these tabs contain data used to calculate values in the spreadsheet and should not be modified):

- Component Lookup
- K8s Resources



**Important:** Do not modify any cells except for the ones indicated below. Modifying the formulas in other cells will result in inaccurate calculations.

### Workload inputs

The spreadsheet calculates the total amount vcores, RAM, and storage required based on information you enter about the combined workloads you intend to deploy. Then based on the hardware specifications entered, calculates the number of worker nodes required, which is displayed in cell E24.

The following sections describe values you must enter into the spreadsheet. Values are required for each Data Service you intend to deploy, and values to enter for the hardware specifications for your worker nodes.

### Cloudera Control Plane monitoring

Label	Cell	Description
Cloudera Control Plane Monitoring	B3	Increment this number by one for each environment.

### Cloudera Data Warehouse

If you will deploy Cloudera Data Warehouse, on the Worker Node Totals tab, enter the following information:

Label	Cell	Description
CDW Data Catalog (min 1 per env)	B5	Enter the number of Data Catalogs you will need in your deployment. You must have at least one Data Catalog.
CDW LLAP warehouses	B6	Enter the number of LLAP warehouses you will need for each Virtual Warehouse in your deployment.
-- LLAP Executors	B7	Enter the total number of LLAP Executors you will need in your deployment.
CDW Impala warehouses	B8	Enter the number of CDW Impala warehouses for each Virtual Warehouse you will need in your deployment.
-- Impala Coordinators (2 x for HA)	B9	Enter the number of Impala Warehouses you will need in your deployment. If you have enabled high availability, enter twice the number of Warehouses.
-- Impala Executors	B10	Enter the number of Impala Executors you will need in your deployment.

Label	Cell	Description
CDW Cache	B11	Enter the amount of CDW Cache space for each coordinator and executor (Default 600)
Data Viz - small instances	B12	Enter the size selected when creating a Data Visualization instance.
Data Viz - medium instances	B13	
Data Viz - large instances	B14	

For more information about sizing Cloudera Data Warehouse deployments, see:

- [Standard resource mode requirements](#)
- [Low resource mode requirements](#)

### Cloudera AI

Sizing for a Cloudera AI deployment depends on the number of concurrent jobs you expect to run and the number of Workspaces you provision.

Label	Cell	Description
CML Workspace (min of 1 )	B16	Enter the number of workspaces you need in your deployment.
-- CML Small concurrent sessions	B17	Enter the number of concurrent small-sized sessions you intend to run.
-- CML Average concurrent sessions	B18	Enter the number of concurrent average-sized sessions you intend to run.

For more information about sizing the Cloudera AI service, see the following topics:

- [Additional resource requirements for Cloudera AI.](#)
- (OCP) [Cloudera AI requirements](#)
- (Cloudera Embedded Container Service) [Cloudera AI requirements](#)

### Cloudera Data Engineering

Label	Cell	Description
CDE Service (min/max 1 per cluster)	B20	Enter the number of Cloudera Data Engineering clusters you will need in your deployment.
CDE Virtual Cluster	B21	Enter the number of Cloudera Data Engineering Virtual Clusters you will need in your deployment.
-- CDE Small concurrent jobs	B22	Enter the number of concurrent small-sized jobs you intend to run.
-- CDE Average concurrent jobs	B23	Enter the number of concurrent average-sized jobs you intend to run.

For more information about sizing the Cloudera Data Engineering service, see [Additional resource requirements for Cloudera Data Engineering](#).

### Worker node hardware specifications

Based on the inputs you supplied for your workloads, the spreadsheet totals the number of vcores, RAM, and storage required for the cluster in cells C20-C26. Then, based on the worker node hardware specifications you enter in cells B26-B29, divides the totals for vcores, RAM and storage by each of the worker node specifications to arrive at the required number of nodes for vcores, RAM and storage shown in cells D5-D29. The final number, in cell E27 chooses the higher value of these cells.

You may notice that the calculated values in cells D26 and D27 are different. This indicates that some nodes are oversubscribed for RAM or vcores. Adjust the hardware specifications for CPU and RAM until the two cells are closer together in value. Changing these values may also change the calculated number of worker nodes.

Label	Cell	Description
CPU recommend 40+ cores (80 vcores)	B27	Enter the number of vcores for each worker node.
RAM (GB) recommend 415 GB RAM	B28	Enter the amount of RAM, in gigabytes, for each worker node.
Disk (GB) Block (OCP CSI block, Cloudera Embedded Container Service Longhorn)	B29	Enter the number of gigabytes Block required for: - OpenShift Container Platform: CSI block - Cloudera Embedded Container Service: Cloudera Embedded Container Service Longhorn
Disk (GB) Fast Cache for Cloudera Data Warehouse (nvme,ssd)	B30	Enter the number of gigabytes of Fast Cache used in Cloudera Data Warehouse.
Cloudera Control Plane Block Overhead per host (300 to 1024)	B31	Enter the Control Plane block overhead
NFS (GB) (choose 1 from below)	B33	Enter required storage in either cell B34 or cell B35
-- Embedded nfs - (subtract from Block provider) non-prod	B34	Enter the number of gigabytes storage for an embedded NFS.
-- External nfs	B35	Enter the number of gigabytes of storage for an External NFS.
Cloudera Embedded Container Service Master Node requires 1 for non HA - 3 for HA  If you are using the Cloudera Embedded Container Service, you will also need to provision a host for the Cloudera Embedded Container Service Master Node (a node running the ECS Server component).  The values described here contain Cloudera's recommendations for specifications for the Cloudera Embedded Container Service Master node.	B38	Minimum: 16 vcores Recommended: 32 vcores
	B39	Minimum: 32 GB RAM Recommended: 64 GB RAM
	B40	Minimum: 300 GB HDD (This amount is adequate for a proof-of-concept cluster.) Recommended: 1 TB HDD

## Docker repository access

You must ensure that the cluster has access to the Docker Container Repository in order to retrieve the container images for deployment.

There are several types of Docker Repositories you can use:

### Embedded Repository

During installation, a Docker daemon is provisioned to act as the Repository. Passwords and certificates are auto generated. No additional set up is needed. Images are copied to the repository during installation. During upgrades, only the new and changed images are copied. Copying images generally takes one to two hours.

It is important to note that the Embedded Repository can be a single point of failure. If the node that runs the Docker Repository fails or becomes unavailable, some cluster functionalities might become

unavailable. Moving the Docker Repository to another node is a complex process and will require engaging Cloudera Professional Services.

### Cloudera Repository

Using the Cloudera Repository requires that the cluster have internet connectivity to the Cloudera public repository. Using the Cloudera Repository is the fastest option.

The Cloudera-hosted Docker Repository option may increase the time required to deploy or start the services in the cluster. Cloudera generates Docker Repository credentials that are identical to your payroll credentials. Refer to your welcome letter for the credentials or use the credential generator on [cloudera.com](https://cloudera.com) to generate credentials from your license key.

This option is best suited for proof-of-concept, non-production deployments or deployments that do not have security requirements that disallow internet access.

### Custom Repository

A Custom Repository is a repository that you manage in your environment and can be Enterprise grade and highly available.

During installation and upgrade, a custom script is generated that you use to copy the images. Copying images can take 4 - 5 hours.

Only TLS-enabled custom Docker Registry is supported. Ensure that you use a TLS certificate to secure the custom Docker Registry. The TLS certificate can be self-signed, or signed by a private or public trusted Certificate Authority (CA).



**Important:** When using an Cloudera Embedded Container Service cluster, passwords must not contain the \$ character.

## Cloudera Data Services on premises Software Requirements

This release ships with Cloudera Manager 7.11.3 CHF 11. If you have an existing Cloudera Base on premises cluster set up using an earlier version of Cloudera Manager, you must first upgrade Cloudera Manager to version 7.11.3 CHF 11.

For more information about specific software requirements, see the [Software Support Matrix for Cloudera Embedded Container Service](#) on page 4.

Additionally, you must perform the following:

- For Cloudera AI, you must install `nfs-utils` in order to mount longhorn-nfs provisioned mounts. The `nfs-utils` package is required on every node of the Cloudera Embedded Container Service cluster. Run this command `yum install nfs-utils` to install `nfs-utils`.
- If you have nodes with GPU, ensure that the GPU hosts have `nVidia Drivers` and `nvidia-container-runtime` installed. You must confirm that drivers are properly loaded on the host by executing the command `nvidia-smi`. You must also install the `nvidia-container-toolkit` package.
- You must have a minimum of one agent node for Cloudera Embedded Container Service.
- Set up Kerberos on these clusters using an Active Directory.
- Enable TLS on the Cloudera Manager cluster for communication with components and services.
- If you do not have entitlements, contact your Cloudera account team to get the necessary entitlements.
- The default docker service uses `/docker` folder. Whether you wish to retain `/docker` or override `/docker` with any other folder, you must have a minimum of 300 GiB free space.
- Create the folder before the start of the installation. For example: `mkdir /ecs/docker`.
- Ensure that all of the hosts in the Cloudera Embedded Container Service cluster have more than 300 GiB of free space in the `/var/lib` directory at the time of installation.
- The cluster generates multiple hosts and host based routing is used in the cluster in order to route it to the right service. You must decide on a domain for the services which Cloudera Manager by default points to one of the host names on the cluster. However, during the installation, you should check the default domain and override the

default domain (only if necessary) with what you plan to use as the domain. To override, create an A record with a wildcard. For Example: \*.apps.APPDOMAIN

- You must install `nvidia-container-toolkit`. (`nvidia-container-runtime` migrated to `nvidia-container-toolkit`, see [Migration Notice](#).) The steps for this are shown in the [NVIDIA Installation Guide](#). If using Red Hat Enterprise Linux (RHEL), use `dnf` to install the package. For an example with RHEL 8.7, see [Installing the NVIDIA Container Toolkit](#).
- Python 3.8 is required for Cloudera Manager version 7.11.3.0 and higher versions. Cloudera Manager agents will not start unless Python 3.8 is installed on the cluster nodes.

Modifying Access Control Lists (ACLs) for any Rancher or Kubernetes-related directories is strictly prohibited as it can cause permission issues, service failures, or security vulnerabilities. Unauthorized ACL changes may lead to:

- Failure of Rancher services to start properly.
- Kubernetes components encountering permission errors.
- Issues with upgrades, backups, or cluster operations.

### Affected Directories

Below are the key Rancher and Kubernetes directories that must not have their ACLs modified:

Rancher-Specific Directories:

- `/var/lib/rancher/` – Contains Rancher cluster data, configurations, and metadata.
- `/etc/rancher/` – Stores Rancher configuration files, certificates, and settings.
- `/var/log/rancher/` – Logs generated by Rancher services.

Kubernetes-Related Directories:

- `/var/lib/kubelet/` – Stores node-level Kubernetes configurations and data.
- `/etc/kubernetes/` – Holds Kubernetes API server, controller manager, and scheduler configurations.
- `/var/lib/etcd/` – Contains the etcd database, critical for cluster state management.
- `/var/log/pods/` – Stores logs for Kubernetes pods.
- `/var/run/secrets/kubernetes.io/` – Used for service account authentication and tokens.

### Best Practices

- Ensure that these directories maintain default ownership and permissions as configured by Rancher/Kubernetes.
- For troubleshooting, rely on logs and built-in diagnostics rather than altering file permissions.

By following these guidelines, you can avoid unexpected permission issues and maintain a stable and secure Rancher/Kubernetes environment.

### Related Information

[Software Support Matrix for Cloudera Embedded Container Service](#)

## Requirements for Cloudera AI on Cloudera Embedded Container Service

There are minimal requirements when using Cloudera AI on Cloudera Embedded Container Service.

The primary requirement is to have 1.5 TB of storage space for internal volumes and internal NFS.



**Note:** The Cloudera Embedded Container Service installation wizard offers a one-time option to download Cloudera AI Docker images. You cannot revisit this option after the installation of the cluster.

For further information, see *Installation using the Cloudera Embedded Container Service*.

## Standard resource mode requirements

Review the memory, storage, and hardware requirements for getting started with the Cloudera Data Warehouse service in standard resource mode on Red Hat OpenShift and Cloudera Embedded Container Service.

To get started with the Cloudera Data Warehouse service on standard resource mode, make sure you have fulfilled the following requirements:

- must be installed and running.
- must be installed and running. See [Installing on OpenShift](#) and [Installing on ECS](#) for more details.
- An environment must have been registered with on the . See [Environments](#) for more details.
- In addition to the general requirements, also has the following minimum memory, storage, and hardware requirements for each worker node using the standard resource mode:

Depending on the number of executors you want to run on each physical node, the per-node requirements change proportionally. For example, if you are running 3 executor pods per physical node, you require 384 GB of memory and approximately 1.8 TB of locally attached SSD/NVMe storage.

The following table lists the minimum and recommended compute (processor), memory, storage, and network bandwidth required for each OpenShift or worker node using the Standard Resource Mode for production use case. Note that the actual node still needs some extra resources to run the operating system, Kubernetes engine, and agent on .

Component	Minimum	Recommended
Node Count	4	10
CPU per worker	16 cores [or 8 cores or 16 threads that have Simultaneous Multithreading (SMT) enabled]	32+ cores (can also be achieved by enabling SMT)
Memory per worker	128 GB per node	384 GB* per node
FAST (Fully Automated Storage Tiering) Cache - Locally attached SCSI device(s) on every worker. Preferred: NVMe and SSD. OCP uses Local Storage Operator. ECS uses Local Path Provisioner.	1.2 TB* SATA, SSD per host	1.2 TB* NVMe/SSD per host
Network Bandwidth	1 GB/s guaranteed bandwidth to every	10 GB/s guaranteed bandwidth to every node



**Important:** When you add memory and storage, it is very important that you add it in the increments as follows:

- Increments of 128 GB of memory
- Increments of 600 GB of locally attached SSD/NVMe storage

If you add memory or storage that is not in the above increments, the memory and storage that exceeds these increments is not used for executor pods. Instead, the extra memory and storage can be used by other pods that require fewer resources.

For example, if you add 200 GB of memory, only 128 GB is used by the executor pods. If you add 2 TB of locally attached storage, only 1.8 TB is used by the executor pods.

## Prerequisites for Cloudera Data Engineering on premises

Prerequisites for Cloudera Data Engineering on premises.

\* Depending on the number of executors you want to run on each physical node, the per-node requirements change proportionally. For example, if you are running 3 executor pods per physical node, you require 384 GB of memory and approximately 1.8TB (600GB per executor) of locally attached SSD/NVMe storage for FAST Cache.

Before deploying CDE, make sure you have reviewed and complied with the requirements in the installation guide for your environment:

- [Installing on OpenShift](#)
- [Installing using the Embedded Container Service](#)

### CDP Private Cloud Base cluster requirements

The CDP Private Cloud Base cluster that you are using for the Cloudera Data Engineering service must have the Apache Ozone service enabled before creating an environment.

### Red Hat OpenShift Container Platform requirements

For CDE Private Cloud running on Red Hat OpenShift Container Platform (OCP), you must configure a route admission policy.

You must configure the OpenShift cluster for running applications in multiple namespaces with the same domain name. Run the following commands. If you have not installed the `oc` command line utility, install it using the [instructions](#) in the OpenShift documentation. For instructions on downloading the OCP kubeconfig file, see [Downloading the Kubernetes Configuration](#).

```
export KUBECONFIG=</path/to/ocp-kubeconfig>

oc -n openshift-ingress-operator patch ingresscontroller/default --patch '{
"spec": {"routeAdmission": {"namespaceOwnership": "InterNamespaceAllowed"}}}' -
-type=merge
```

## Installation using the Cloudera Embedded Container Service

### Preparing Cloudera Base on premises

Use Cloudera Manager to configure your Cloudera Base on premises cluster in preparation for the Cloudera Data Services on premises installation.

1. Perform the steps from [Configuring TLS Encryption for Cloudera Manager Using Auto-TLS](#) to configure TLS encryption for CDP Private Cloud Base cluster.
2. Configure Cloudera Manager with a JKS-format (not PKCS12) TLS truststore. For more information, see [Database requirements](#).
3. Configure Cloudera Manager to include a root certificate that trusts the certificate for all Cloudera Manager server hosts you use with the Cloudera Base on premises, LDAP server (if you are using LDAP), and the Postgres DB of all Hive Metastores that you use with Cloudera Base on premises. If you use a single certificate authority (CA) to sign the certificate for all Cloudera Manager server hosts, then you must import only that single CA.
  - a. Import the necessary certificates into the truststore configured in `Configure Administration > Settings > Security > Cloudera Manager TLS/SSL Client Trust Store File`.
4. Enable Kerberos authentication for all the services in Cloudera Base on premises cluster. For more information, see the [Enabling Kerberos for authentication](#).
5. Configure Ranger to use LDAP for user authentication. Ensure that you have set up Ranger user synchronization. For more information, see [Configure Ranger authentication for LDAP](#) and [Ranger usersync](#).
6. Configure authentication using an LDAP in Cloudera Manager IPA, Microsoft Active Directory (AD), and OpenLDAP are currently supported. For more information, see [Configure authentication using an LDAP-compliant identity service](#).

7. Verify if all the running services in the cluster are healthy. To verify the health issues of all the running services in the cluster do the following:
 

On the Cloudera Manager UI, go to Clusters > [\*\*\*CLUSTER NAME\*\*\*] > All Health Issues . If there are no health issues, then Cloudera Manager displays the No Health Issues Found message.
8. If you want to reuse data from your legacy CDH or HDP deployment into your Cloudera Base on premises cluster, copy the data from your CDH or HDP deployments into the Cloudera Base on premises cluster that you can access by Cloudera Data Services on premises. For more information about data migration, see [Data Migration Guide](#).
9. For installing Cloudera Base on premises, see the [Install Cloudera Private Cloud Base](#)

## Cloudera Base on premises checklist

Use this checklist to ensure that your Cloudera Base on premises is configured and ready for installing Cloudera Data Services on premises.



**Note:** The Cloudera Manager mentioned in this checklist is the Cloudera Base on premises Cloudera Manager using which you want to install Cloudera Data Services on premises.

**Table 3: Cloudera Base on premises checklist to install Cloudera Data Services on premises**

Item	Summary	Documentation	Notes
Runtime components	Ensure that you have Ranger, Atlas, Hive, HDFS, and Ozone installed in your Cloudera Base on premises.	<ul style="list-style-type: none"> <li>• <a href="#">Software Support Matrix for Cloudera Embedded Container Service</a> on page 4</li> <li>• <a href="#">Cloudera Private Cloud Base requirements</a></li> </ul>	If you do not install these components, you see an error when creating an environment in Cloudera Data Services on premises.
Network requirement	Ensure that all the network routing hops in production. Cloudera recommends not to use more than 4:1 oversubscription between the spine-leaf switches.		
Cloudera Manager database requirement	Refer to the the Cloudera Base on premises database requirements.	<ul style="list-style-type: none"> <li>• <a href="#">Database Requirements</a></li> <li>• <a href="#">Cloudera Support Matrix</a></li> </ul>	N/A
Cloudera Manager TLS configuration	Ensure that Cloudera Manager in the Cloudera Base on premises cluster is configured to use TLS.	<a href="#">Configuring TLS Encryption for Cloudera Manager Using Auto-TLS</a>	You can also manually configure TLS to complete this task. See <a href="#">Manually Configuring TLS Encryption for Cloudera Manager</a>
Cloudera Manager JKS-format TLS truststore	Ensure that the Cloudera Manager is configured with a JKS-format (not PKCS12) TLS truststore.	<a href="#">Obtain and Deploy Keys and Certificates for TLS/SSL</a>	N/A
Cloudera Manager truststore and root certificate	Ensure that the Cloudera Manager truststore contains a root certificate that trusts the certificate for all Cloudera Manager server hosts used with CDP Private Cloud Data Services.	<a href="#">How to Add Root and Intermediate CAs to Truststore for TLS/SSL</a>	Import the necessary certificates into the truststore configured in <a href="#">Configure Administration &gt; Settings &gt; Security &gt; Cloudera Manager TLS/SSL Client Trust Store File</a> .
LDAP configuration	Ensure that you configure LDAP using Cloudera Manager.	N/A	Only Microsoft Active Directory (AD) and OpenLDAP are currently supported.
Apache Ranger configuration for LDAP	Ensure that the Cloudera Base on premises cluster is configured with Apache Ranger and LDAP for user authentication.	<a href="#">Configure Ranger authentication for LDAP</a>	N/A



Item	Summary	Documentation	Notes
Apache Ranger usersync configuration	Ensure that you have configured Apache Ranger and Apache Ranger usersync.	<a href="#">Ranger usersync</a>	Apache Ranger user synchronization is used to get users and groups from the corporate ActiveDirectory to use in policy definitions.
Kerberos configuration	Ensure that Kerberos is enabled for all services in the cluster.	<a href="#">Enabling Kerberos for authentication</a>	Custom Kerberos principals are not currently supported.
Internet access or air gap installation	Ensure that Cloudera Base on premises and the Cloudera Embedded Container Service hosts have access to the Internet. If you do not have access to the Internet, you must do an air gap installation.	<a href="#">Install Cloudera Private Cloud Data Services in air gap environment</a>	You need access to the Docker registries and the Cloudera repositories during the installation process.
Services health check	Ensure that all services running in the cluster are healthy.	<a href="#">Cloudera Manager Health Tests</a>	N/A
Cloudera on premises entitlement	Ensure that you have the necessary Cloudera entitlement to access the on premises installation.	N/A	
Reuse data from CDH or HDP (Optional)	To reuse data from your legacy CDH or HDP deployment in your on premises, ensure that you have migrated that data into your Cloudera Base on premises. You must be using Cloudera Runtime 7.1.7 for migrating data from your CDH or HDP cluster.	<a href="#">Data Migration Guide</a>	N/A
(Recommended) Configure HDFS properties to optimize logging	Cloudera uses “out_webhdfs” Fluentd output plugin to write records into HDFS, in the form of log files, which are then used by different data services to generate diagnostic bundles. To optimize the size of logs that are captured and stored on HDFS, you must update a few HDFS configurations in the hdfs-site.xml file using Cloudera Manager.	<a href="#">Configuring HDFS properties to optimize logging</a>	N/A

## Cloudera Embedded Container Service checklist

Use this checklist to ensure that your Cloudera Embedded Container Service is configured and ready for installing Cloudera Data Services on premises.

**Table 4: Cloudera Embedded Container Service checklist to install Cloudera Data Services on premises**

Item	Summary	Documentation	Notes
Network requirements			Cloudera Data Services on premises requires a single ethernet interface. Multihoming is currently not supported.

Item	Summary	Documentation	Notes
DNS configuration	Ensure that you have set up the DNS and Reverse DNS between Cloudera Embedded Container Service hosts and Cloudera Base on premises. This is required for obtaining Kerberos ticket-granting tickets.	N/A	A wildcard DNS entry is required for resolving the ingress route for applications. The ingress route is usually behind a load balancer.
Check that ECS Ingress can be resolved in DNS.	Ensure that Cloudera Embedded Container Service application hostnames can be accessed from outside the cluster. You can test this by creating an ingress point on the target cluster.	The cluster generates multiple hosts and host-based routing is used in the cluster in order to route it to the right service. You must decide on a domain for the services which Cloudera Manager, by default points to one of the hostnames on the cluster. However, during the installation, you should check the default domain and override the default domain (only if necessary) with what you plan to use as the domain. The default domain must have a wildcard DNS entry. For example, *.apps.myhostname.com.	Perform a DNS query on the ingress point, to check if you can access the hostnames outside the cluster.
Clock time from NTP source	Ensure that the NTP clock in Cloudera Base on premises is in sync with the time configured in the Cloudera Embedded Container Service cluster. This is an important step if your setup does not have access to the Internet.	<a href="#">Enable an NTP Service</a>	<a href="#">Installing Cloudera on Premises Data Services (ECS)</a>
Default subnet created for docker service	The default subnet used by docker is 172.17.0.0/16. Since the IP range within the subnet is used by docker, any internal applications running or using an IP in this range will not be accessible.	<a href="#">Docker documentation</a>	Ensure 172.17.0.0/16 IP range is not used by other applications or services, to avoid conflicts with the docker subnet. You can use a different subnet for docker if needed.

## Adding a Cloudera Data Services on premises cluster

Using Cloudera Manager, you can either install Cloudera Data Services on premises by downloading the repository from the Internet, or you can do an air gap installation if Cloudera Manager does not have access to the Internet.

Before you begin:



### Important:

RHEL 7.x support on Cloudera Embedded Container Service has been dropped in Cloudera Data Services on premises 1.5.4 and higher versions. If you are running RHEL 7.x, you must upgrade to a higher version before installing Cloudera Data Services on premises.

Requirements for 1.5.4 release:

- Ensure that you have Cloudera Manager 7.11.3 CHF 6 is installed and you have the entitlements to the Cloudera Data Services on premises product.
- For more information about Python-OS support matrix, see [Installing Python 3](#) and [Cloudera Support Matrix](#).
- Only TLS 1.2 is supported for authentication with Active Directory/LDAP. You require TLS 1.2 to authenticate the Cloudera Control Plane with your LDAP directory service like Active Directory.
- If the installer fails, do not cancel the installation. For more information, see [Manually uninstalling ECS from a cluster](#).

- Do not use any antivirus or other security tools on the Cloudera Embedded Container Service nodes. These third-party tools may cause issues with Cloudera Embedded Container Service functionality.

Requirement for 1.5.4 CHF1 release:

1. Minimum Cloudera Manager version 7.11.3.14 is required for Cloudera Data Services on premises 1.5.4 CHF1.
2. For more information about Python-OS support matrix, see [Installing Python 3](#) and [Cloudera Support Matrix](#) .

Requirement for 1.5.4 SP1 release:

1. Minimum Cloudera Manager version 7.11.3 CHF11 is required for Cloudera Data Services on premises 1.5.4 SP1.
2. For more information about Python-OS support matrix, see [Installing Python 3](#) and [Cloudera Support Matrix](#) .

## Installing Cloudera Data Services on premises using Cloudera Embedded Container Service

Follow the steps in this topic to install Cloudera Data Services on premises with the Cloudera Embedded Container Service.

### About this task



#### Important:

RHEL 7.x support on Cloudera Embedded Container Service has been dropped in Cloudera Data Services on premises 1.5.4 and higher versions. If you are running RHEL 7.x, you must upgrade to a higher version before installing Cloudera Data Services on premises.



**Note:** When deploying an Cloudera Embedded Container Service cluster, the batch size limitation for adding Cloudera Embedded Container Service agent nodes to Cloudera Embedded Container Service cluster is under 50. If there is a requirement to deploy an Cloudera Embedded Container Service cluster with more than 50 nodes, it is recommended to start the initial deployment with less than 50 nodes and incrementally add nodes to the cluster after the first installation succeeds.



**Note:** Prior to configuring Cluster IP Range (cluster-cidr) and Service IP Range (service-cidr) in step 11, ensure to review best practices [here](#). Once your cluster has been deployed, these values cannot change. Any misconfiguration will require decommissioning the cluster and redeploying it to correct the settings.

### Procedure

1. If you are installing Cloudera Embedded Container Service on RHEL 8 or RHEL 9:
  - a) Run the following command to check to see if the nm-cloud-setup.service and nm-cloud-setup.timer services are enabled:

```
systemctl status nm-cloud-setup.service nm-cloud-setup.timer
```

- b) If the nm-cloud-setup.service and nm-cloud-setup.timer services are enabled, disable them by running the following command on each host you added:

```
systemctl disable nm-cloud-setup.service nm-cloud-setup.timer
```

For more information, see [Known issues and limitations](#).

- c) If you disabled the nm-cloud-setup.service and nm-cloud-setup.timer services, reboot the added hosts.

2. In Cloudera Manager, click Data Services in the left menu.

The screenshot shows the Cloudera Manager interface. On the left, the 'Data Services' menu item is highlighted with a blue box and a 'New' badge. The main content area displays 'Cluster 1' with a list of services:

Service Name	Status	Issues
Cloudera Runtime 7.1.9 (Parcels)	✓	
3 Hosts	✓	2
ATLAS-1	✓	
CORE_SETTINGS-1	○	
CRUISE_CONTROL-1	✓	
HBASE-1	✓	1
HDFS-1	✓	1
HIVE-1	✓	1
HIVE_ON_TEZ-1	✓	1
HUE-1	✓	

On the right, there are two charts: 'Cluster CPU' showing usage across hosts at 14.2%, and 'Cluster Disk IO' showing total disk bytes at 43.2M/s and 32M/s.

The Add Private Cloud Containerized Cluster page appears. Click Continue.

The screenshot shows the 'Add Private Cloud Containerized Cluster' page. The main heading is 'Add Private Cloud Containerized Cluster'. Below it, there is a diagram of a private cloud containerized cluster. The text reads:

**Private Cloud Containerized Cluster** New

Add a Private Cloud Containerized Cluster to access our latest data analytic data services on a container cloud with separated compute and storage.

[Selected](#)

CDP Private Cloud is a next-generation data platform with container-native, self-service analytic data services bringing the speed, scale, and economics of the cloud to on-premise data centers.

Click **Continue** to add a CDP Private Cloud Containerized Cluster, accessing data stored in HDFS or Ozone on an existing storage cluster running Cloudera Runtime 7.x. This cluster will be managed by this Cloudera Manager instance.

Other Options

Click [here](#) to install the same CDP Private Cloud Data Services as above, but in a separately provisioned and managed container application platform such as OpenShift. Cloudera Manager will not be managing this OpenShift instance.

At the bottom right, there are 'Back' and 'Continue' buttons, with 'Continue' highlighted by a blue box.



**Note:** You can also click **Add Add Cluster** at the top right in Cloudera Manager, then select **Private Cloud Containerized Cluster** as the cluster type.

3. On the Getting Started page of the installation wizard, select Internet or Air Gapped as the Install Method.

Internet install method (To use a custom repository link provided to you by Cloudera, click Custom Repository) :

CDP Deployment from 2024-APR-22 12:02

## Add Private Cloud Containerized Cluster

- 1 Getting Started
- 2 Cluster Basics
- 3 Specify Hosts
- 4 Assign Roles
- 5 Configure Docker Repository
- 6 Configure Data Services
- 7 Configure Databases
- 8 Install Parcels
- 9 Check Prerequisites
- 10 Inspect Cluster
- 11 Install Data Services
- 12 Summary

### Getting Started

This wizard provides step-by-step guidance for installing CDP Private Cloud Containerized cluster.

Installation of the CDP Private Cloud Data Services components (for trial purposes or for production use) requires an appropriate license key.

Visit the [CDP Private Cloud Installation](#) documentation for more information.

Install Method

Internet  Air Gapped

1. Select Repository

Custom Repository

You are about to install CDP Private Cloud Data Services version 1.5.4.

What's new in version 1.5.4:

- [Release Notes](#)
- RHEL 7.x support has been removed for CDP Private Cloud Data Services 1.5.4 and above. Please ensure that prior to upgrading the Data Services Cluster, an OS upgrade is performed first. Installations and upgrades will fail for CDP Private Cloud Data Services if the OS requirement is not met. Please note that this restriction applies to ECS deployment of Data Services only.

Cancel

← Back
Continue →

If you select the Air Gapped install option, extra steps are displayed. Follow these steps to download and mirror the Cloudera archive URL using a local HTTP server.

- a. Download everything under: <https://archive.cloudera.com/p/cdp-pvc-ds/latest>

```
wget -l 0 --recursive --no-parent -e robots=off -nH --cut-dirs=2 --reject="index.html*" -t 10 https://<username>:<password>@archive.cloudera.com/p/cdp-pvc-ds/latest/
```

- b. Edit the manifest.json file in the downloaded directory. Change "http\_url": "..." to

```
"http_url": "http://your_local_repo/cdp-pvc-ds/latest"
```

- c. Mirror the downloaded directory to your local http server, e.g. [http://your\\_local\\_repo/cdp-pvc-ds/latest](http://your_local_repo/cdp-pvc-ds/latest)
- d. Click Custom Repository and add [http://your\\_local\\_repo/cdp-pvc-ds/latest](http://your_local_repo/cdp-pvc-ds/latest) as a custom repository.
- e. Click the Select Repository drop-down and select [http://your\\_local\\_repo/cdp-pvc-ds/latest](http://your_local_repo/cdp-pvc-ds/latest)

CDEP Deployment from 2024-Apr-22 12:02

# Add Private Cloud Containerized Cluster

- 1 Getting Started
- 2 Cluster Basics
- 3 Specify Hosts
- 4 Assign Roles
- 5 Configure Docker Repository
- 6 Configure Data Services
- 7 Configure Databases
- 8 Install Parcels
- 9 Check Prerequisites
- 10 Inspect Cluster
- 11 Install Data Services
- 12 Summary

## Getting Started

This wizard provides step-by-step guidance for installing CDP Private Cloud Containerized cluster.

Installation of the CDP Private Cloud Data Services components (for trial purposes or for production use) requires an appropriate license key.

Visit the [CDP Private Cloud Installation](#) documentation for more information.

Install Method

Internet  Air Gapped

Installing via a local mirror with an http server. You will need to setup a full mirror of Cloudera's repositories via a temporary http server within the perimeter network of all hosts.

- Download everything under `https://archive.cloudera.com/p/cdp-pvc-ds/latest`

```
$ wget -l 0 --recursive --no-parent -e robots=off -nH --cut-dirs=2 --reject="index.html*" -t 10 https://<username>:<password>@archive.cloudera.com/p/cdp-pvc-ds/latest
```

- Modify the file `manifest.json` inside the downloaded directory, change `"http_url": "..."` to `"http_url": "http://your_local_repo/cdp-pvc-ds/latest"`
- Mirror the downloaded directory to your local http server, e.g. `http://your_local_repo/cdp-pvc-ds/latest`
- Add `http://your_local_repo/cdp-pvc-ds/latest` to your [Custom Repository](#) settings and select it from the dropdown below.
- Select Repository

[Custom Repository](#)

You are about to install CDP Private Cloud Data Services version 1.5.4-1000.

What's new in version 1.5.4-1000.

[Cancel](#) [← Back](#) [Continue →](#)

Click Continue.

4. On the Cluster Basics page, type a name for the Private Cloud cluster that you want to create in the Cluster Name field. From the Base Cluster drop-down list, select the cluster that has the storage and SDX services that you want this new Private Cloud Data Services instance to connect with. Click Continue.


CDEP Deployment from 2024-Apr-22 12:02

## Add Private Cloud Containerized Cluster

- 1 Getting Started
- 2 Cluster Basics**
- 3 Specify Hosts
- 4 Assign Roles
- 5 Configure Docker Repository
- 6 Configure Data Services
- 7 Configure Databases
- 8 Install Parcels
- 9 Check Prerequisites
- 10 Inspect Cluster
- 11 Install Data Services
- 12 Summary

### Cluster Basics

Cluster Name



**Private Cloud Containerized Cluster**

A Private Cloud Containerized Cluster helps you to install and run CDP Private Cloud Data Services such as Machine Learning and Data Warehouse with data from an existing Base Cluster. Learn more at [CDP Private Cloud Containerized Cluster](#).

Base Cluster

Use Default Configuration  
Use embedded Docker Repository, Vault and Database with default settings, and use default configurations for Role Assignments. Not recommended for production.

[Cancel](#) [← Back](#) [Continue →](#)

5. On the Specify Hosts page, hosts that have already been added to Cloudera Manager are listed on the Currently Managed Hosts tab. You can select one or more of these hosts to add to the ECS cluster.

CDEP Deployment from 2024-Apr-22 12:02

## Add Private Cloud Containerized Cluster

- ✓ Getting Started
- ✓ Cluster Basics
- 3 Specify Hosts**
- 4 Assign Roles
- 5 Configure Docker Repository
- 6 Configure Data Services
- 7 Configure Databases
- 8 Install Parcels
- 9 Check Prerequisites
- 10 Inspect Cluster
- 11 Install Data Services
- 12 Summary

### Specify Hosts

Currently Managed Hosts (3/3 Selected) New Hosts

These hosts do not belong to any clusters. Select some to form your cluster.

<input checked="" type="checkbox"/> Hostname (FQDN) ↑	IP Address	Rack	Version	Cores
<input checked="" type="checkbox"/> ecsxm-1.vpc.cloudera.com	10.65.219.71	/default	None	8
<input checked="" type="checkbox"/> ecsxm-2.vpc.cloudera.com	10.65.215.116	/default	None	8
<input checked="" type="checkbox"/> ecsxm-3.vpc.cloudera.com	10.65.213.166	/default	None	8

1 - 3 of 3

Cancel
← Back
Continue →

You can also click the New Hosts tab to specify one or more hosts that have not been added to Cloudera Manager. Enter a Fully Qualified Domain Name in the Hostname box, then click Search.



**Note:** Click the pattern link under the Hostname box to display more information about allowed FQDN patterns.



CDEP Deployment from 2024-Apr-22 12:02

## Add Private Cloud Containerized Cluster

- Getting Started
- Cluster Basics
- 3 Specify Hosts**
- 4 Select JDK
- 5 Enter Login Credentials
- 6 Install Agents
- 7 Assign Roles
- 8 Configure Docker Repository
- 9 Configure Data Services
- 10 Configure Databases
- 11 Install Parcels
- 12 Check Prerequisites
- 13 Inspect Cluster
- 14 Install Data Services

### Specify Hosts

Currently Managed Hosts (0/3 Selected) [New Hosts \(3 Selected\)](#)

Hosts should be specified using the same hostname (FQDN) that they will identify themselves with.

Hostname

Hint: Search for hostnames or IP addresses using [pattern](#)

SSH Port

3 hosts scanned, 3 running SSH.

<input checked="" type="checkbox"/>	Expanded Query	Hostname (FQDN) ↑	IP Address	Currently Managed	Result
<input checked="" type="checkbox"/>	ecsx-1.vpc.cloudera.com	ecsx-1.vpc.cloudera.com	10.65.204.178	No	Host was successfully scanned.
<input checked="" type="checkbox"/>	ecsx-2.vpc.cloudera.com	ecsx-2.vpc.cloudera.com	10.65.200.92	No	Host was successfully scanned.
<input checked="" type="checkbox"/>	ecsx-3.vpc.cloudera.com	ecsx-3.vpc.cloudera.com	10.65.207.200	No	Host was successfully scanned.

1 - 3 of 3

[Cancel](#) [← Back](#) [Continue →](#)

After you have finished specifying the ECS hosts, click Continue.

6. On the Select JDK page, select any one from the below options:
- Manually manage JDK
  - Install a Cloudera-provided version of OpenJDK
  - Install a system-provided version of OpenJDK

CDEP Deployment from 2024-Apr-22 12:02

## Add Private Cloud Containerized Cluster

- ✓ Getting Started
- ✓ Cluster Basics
- ✓ Specify Hosts
- 4 Select JDK**
- 5 Enter Login Credentials
- 6 Install Agents
- 7 Assign Roles
- 8 Configure Docker Repository
- 9 Configure Data Services
- 10 Configure Databases
- 11 Install Parcels
- 12 Check Prerequisites
- 13 Inspect Cluster
- 14 Install Data Services
- 15 Summary

### Select JDK

CDH Version	Supported JDK Version
7.1.9 and above	OpenJDK 8, 11, 17 or Oracle JDK 8, 11, 17
7.1.1 to 7.1.8	OpenJDK 8, 11 or Oracle JDK 8, 11
7.0 and above	OpenJDK 8 or Oracle JDK 8
6.3 and above	OpenJDK 8 or Oracle JDK 8
6.2	OpenJDK 8 or Oracle JDK 8
6.1 or 6.0	Oracle JDK 8
5.16 and above	OpenJDK 8 or Oracle JDK 8
5.7 to 5.15	Oracle JDK 8

1 - 8 of 8 [More details on supported JDK version.](#)

If you plan to use JDK 11 with CDH 7.1.x and above or JDK 17 with CDH 7.1.9 and above, you will need to install it manually on all hosts and then select the **Manually manage JDK** option below.

Manually manage JDK

i Please ensure that a supported JDK is **already installed** on all hosts. You will need to manage installing the unlimited strength JCE policy file, if necessary.

Install a Cloudera-provided version of OpenJDK

By proceeding, Cloudera will install a supported version of OpenJDK version 8.

Install a system-provided version of OpenJDK

By proceeding, Cloudera will install the default version of OpenJDK version 8 provided by the Operating System.

Cancel
← Back
Continue →

- On the Enter Login Credentials page, All hosts accept the same password is selected by default. Enter the user name in the SSH Username box, and type in and confirm the password. You can also select the All hosts accept the same private key option and provide the Private Key and passphrase.

CDEP Deployment from 2024-Apr-22 12:02

## Add Private Cloud Containerized Cluster

- Getting Started
- Cluster Basics
- Specify Hosts
- Select JDK
- 5 Enter Login Credentials**
- 6 Install Agents
- 7 Assign Roles
- 8 Configure Docker Repository
- 9 Configure Data Services
- 10 Configure Databases
- 11 Install Parcels
- 12 Check Prerequisites
- 13 Inspect Cluster
- 14 Install Data Services
- 15 Summary

### Enter Login Credentials

Root access to your hosts is required to install the Cloudera packages. This installer will connect to your hosts via SSH and log in either directly as root or as another user with password-less sudo/pbrun privileges to become root.

SSH Username

Authentication Method  All hosts accept same password  
 All hosts accept same private key

Password

Confirm Password

SSH Port

Simultaneous Installations   
(Running a large number of installations at once can consume large amounts of network bandwidth and other system resources)

[Cancel](#) [← Back](#) [Continue →](#)

8. The Install Agents page appears and displays a progress indicator as the agent packages are installed.

CDEP Deployment from 2024-Apr-22 12:02

## Add Private Cloud Containerized Cluster

- Getting Started
- Cluster Basics
- Specify Hosts
- Select JDK
- Enter Login Credentials
- 6 Install Agents**
- 7 Assign Roles
- 8 Configure Docker Repository
- 9 Configure Data Services
- 10 Configure Databases
- 11 Install Parcels
- 12 Check Prerequisites
- 13 Inspect Cluster
- 14 Install Data Services
- 15 Summary

### Install Agents

**Installation in progress.**

0 of 3 host(s) completed successfully. [Abort Installation](#)

Hostname	IP Address	Progress	Status
ecsx-1.vpc.cloudera.com	10.65.204.178	<div style="width: 50%;"></div>	<a href="#">Installing cloudera-manager-agent package...</a> <a href="#">Details</a>
ecsx-2.vpc.cloudera.com	10.65.200.92	<div style="width: 50%;"></div>	<a href="#">Installing cloudera-manager-agent package...</a> <a href="#">Details</a>
ecsx-3.vpc.cloudera.com	10.65.207.200	<div style="width: 50%;"></div>	<a href="#">Installing cloudera-manager-agent package...</a> <a href="#">Details</a>

1 - 3 of 3

[Cancel](#)[← Back](#)[Continue →](#)

9. On the Assign Roles page, you can customize the roles assignment for your new Private Cloud Containerized cluster.



**Important:** Cloudera does not recommend altering assignments unless you have specific requirements such as having selected a specific host for a specific role.

CDEP Deployment from 2024-Apr-22 12:02

## Add Private Cloud Containerized Cluster

- Getting Started
- Cluster Basics
- Specify Hosts
- Select JDK
- Enter Login Credentials
- Install Agents
- 7
**Assign Roles**- 8 Configure Docker Repository
- 9 Configure Data Services
- 10 Configure Databases
- 11 Install Parcels
- 12 Check Prerequisites
- 13 Inspect Cluster
- 14 Install Data Services
- 15 Summary

### Assign Roles

You can customize the role assignments for your new cluster here, but if assignments are made incorrectly, such as assigning too many roles to a single host, this can impact the performance of your services. Cloudera does not recommend altering assignments unless you have specific requirements, such as having pre-selected a specific host for a specific role.

You can also view the role assignments by host. [View By Host](#)

**DOCKER**

Docker Server × 1 New

ecsx-3.vpc.cloudera.com

**ECS**

Ecs Server × 1 New


ecsx-1.vpc.cloudera.com

Ecs Agent × 2 New

ecsx-[2-3].vpc.cloudera.com

Cancel
← Back
Continue →

Single node ECS installation is supported, but is only intended to enable CDSW to CML migration. If you are installing ECS on a single node, only the Docker and ECS Server roles are assigned. The ECS Agent role is not required for single node installation.

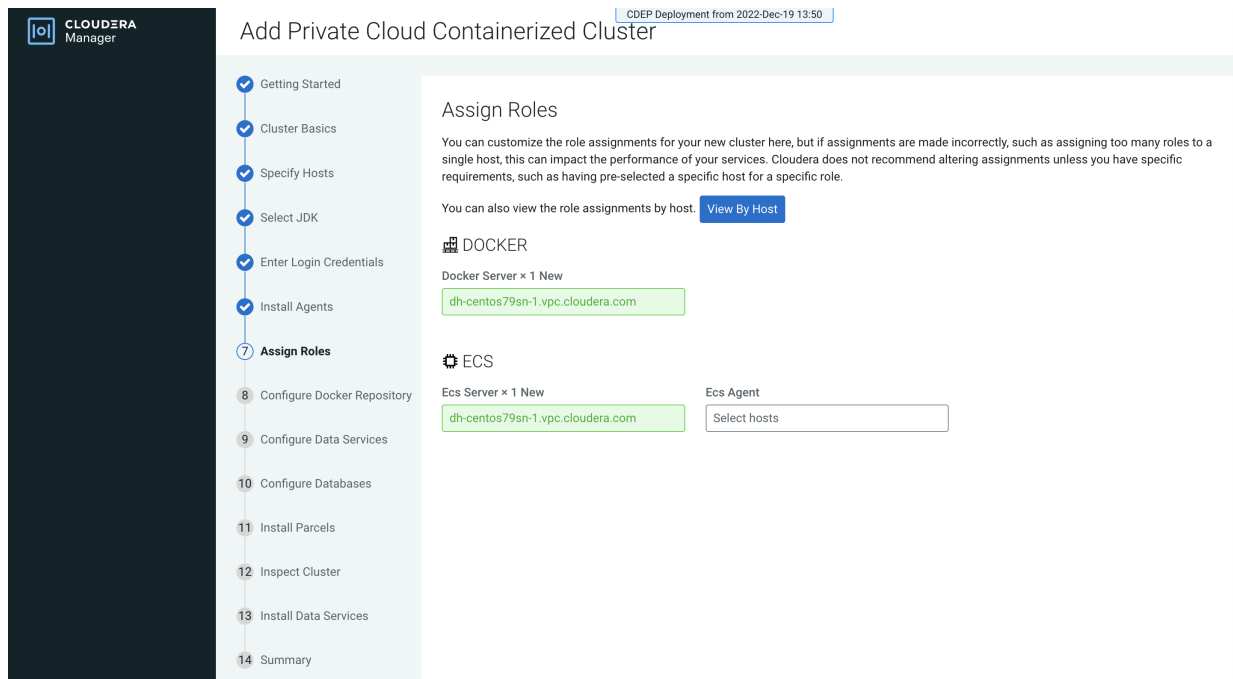

Click Continue.

**10. Configure a Docker Repository.**

There are several options for configuring a Docker Repository. For more information about these options, see [Docker repository access](#) on page 11.



**Note:** You need to get the Generate the copy-docker script button working to generate and download the script.

- a. Ensure Cloudera Manager Server host's /tmp is mounted without " noexec " option, OR
- b. Customize tmpdir to some other directory by adding flag -Djava.io.tmpdir=/opt/cloudera to CMF\_JAVA\_OPTS in the file /etc/default/cloudera-scm-server followed by Cloudera Manager Server restart AND
- c. Ensure not to use podman service on the server hosting the images as it will fail to install.

The following ports must be opened and allowed no matter which Docker repository option you choose.

- Ports required for Cloudera Manager/Cloudera Manager agent (port 5000 is required for Cloudera Machine Learning):

Protocol	Port
TCP	7180-7192
TCP	19001
TCP	5000
TCP	9000

- Inbound rules for ECS Server nodes (Kubernetes/RKE2):

Protocol	Port
TCP	9345
TCP	6443
UDP	8472

<b>Protocol</b>	<b>Port</b>
TCP	10250
TCP	2379
TCP	2380

Protocol	Port
TCP	30000-32767

- Inbound Rules for the ECS Agent (Kubernetes/RKE2):

Protocol	Port
UDP	4789

On the Configure Docker Repository page, select one of these options:

- Embedded Docker Repository

Add Private Cloud Containerized Cluster

CDEP Deployment from 2024-Apr-22 12:02

**Configure Docker Repository**

Cloudera uses a Docker Repository to deliver CDP Private Cloud Data Services. [Learn more](#) about how to set up custom Docker Repository for CDP Private Cloud Data Services.

Use an embedded Docker Repository  
 Use Cloudera's default Docker Repository  
 Use a custom Docker Repository

This release comes with 301 container images that need to be deployed to the Docker repository. Some images are optional and can be skipped by toggling them from the list below. Other images are always installed.

Default     Select the Optional Images

Cloudera Machine Learning  
 Docker images required to create a Cloudera Machine Learning workspace. Without these images, it will not be possible to use Cloudera Machine Learning.

The system will deploy 301 container images, approximately 173 GiB, to the embedded Docker repository.

Cancel    < Back    Continue >

If you select the Internet Install Method option on the Getting Started page, images are copied over the internet from the Cloudera repository.

If you select the Air Gapped option, images are copied from a local http mirror you have set up in your environment.

Select Default to deploy all of the default Docker images to the repository, or select Select the Optional Images to choose which images to deploy. If you will be deploying Cloudera Machine Learning (CML), toggle the Cloudera Machine Learning switch on to copy the images for CML.

- Cloudera default Docker Repository

This option requires that cluster hosts have access to the internet and you have selected Internet as the install method.



CDEP Deployment from 2024-Apr-22 12:02

## Add Private Cloud Containerized Cluster

Getting Started

Cluster Basics

Specify Hosts

Select JDK

Enter Login Credentials

Install Agents

Assign Roles

**8 Configure Docker Repository**

9 Configure Data Services

10 Configure Databases

11 Install Parcels

12 Check Prerequisites

13 Inspect Cluster

14 Install Data Services

15 Summary

### Configure Docker Repository

Cloudera uses a Docker Repository to deliver CDP Private Cloud Data Services. [Learn more](#) about how to set up custom Docker Repository for CDP Private Cloud Data Services.

Use an embedded Docker Repository

Use Cloudera's default Docker Repository

Use a custom Docker Repository

Cancel ← Back Continue →

- Custom Docker Repository

CDEP Deployment from 2024-Apr-22 12:02

## Add Private Cloud Containerized Cluster

- ✓ Getting Started
- ✓ Cluster Basics
- ✓ Specify Hosts
- ✓ Select JDK
- ✓ Enter Login Credentials
- ✓ Install Agents
- ✓ Assign Roles
- 8 **Configure Docker Repository**
- 9 Configure Data Services
- 10 Configure Databases
- 11 Install Parcels
- 12 Check Prerequisites
- 13 Inspect Cluster
- 14 Install Data Services
- 15 Summary

### Configure Docker Repository

Cloudera uses a Docker Repository to deliver CDP Private Cloud Data Services. [Learn more](#) about how to set up custom Docker Repository for CDP Private Cloud Data Services.

Use an embedded Docker Repository  
 Use Cloudera's default Docker Repository  
 Use a custom Docker Repository

Custom Docker Repository ⓘ

Prepare your Docker Repository from a machine that is running Docker locally and has access to all the Docker images either directly from Cloudera or from a local http mirror in your network. If your custom repository already has all the Docker images for this version, this section can be skipped.

1. [Generate the copy-docker script](#)
2. Optionally, review the script. The file contains usage information and lists the Docker images that it will download and push.
3. Login to your custom Docker Registry and run the script with the following commands (Note: this downloads 100+ Docker images and it will take a while):

```
docker login <your_custom_registry> -u <user_with_write_access>
bash copy-docker.txt
```

I confirm that I have downloaded all the Docker images to my custom Docker Repository.

Docker Username ⓘ

Docker Password ⓘ

Docker Certificate ⓘ

[Choose File](#)

[Cancel](#)
[← Back](#)
[Continue →](#)

This option requires that you set up a Docker Repository in your environment and that all cluster hosts have connectivity to the repository.



**Note:** If you are installing ECS on a single node, you should select the Use a Custom Docker Repository option. Single node ECS installation is supported, but is only intended to enable CDSW to CML migration.

You must enter the following options:

- Custom Docker Repository – Enter the URL for your Docker Repository
- Docker Username – Enter the username for the Docker Repository.
- Docker Password – Enter the password for the Docker Repository.



**Important:** Do not use the \$ character for this password.

- Docker Certificate – Click the Choose File button to upload a TLS certificate to secure communications with the Docker Repository.

Click the Generate the copy-docker script button to generate and download a script that copies the Docker images from Cloudera, or (for air-gapped installation) from a local http mirror in your network.

Run the script from a machine that is running Docker locally and has access to the Docker images using the following commands:

```
docker login [***URL FOR DOCKER REPOSITORY***] -u [***USERNAME OF USER  
WITH WRITE ACCESS***]  
  
bash copy-docker.txt
```

The copying operation may take 4 - 5 hours.

- 11.** On the Configure Data Services page, you can modify configuration settings such as the data storage directory, number of replicas, and so on. If there are multiple disks mounted on each host with different characteristics (HDD and SSD), then Local Path Storage Directory must point to the path belonging to the optimal storage. Ensure that you have reviewed your changes. If you want to specify a custom certificate, place the certificate and the private key in a specific location on the Cloudera Manager server host and specify the paths in the input boxes

labelled as Ingress Controller TLS/SSL Server Certificate/Private Key File below. This certificate will be copied to the Control Plane during the installation process.



**Note:**

The "Ingress Controller TLS/SSL Server Certificate File (PEM Format)" must only contain -----BEGIN CERTIFICATE----- through -----END CERTIFICATE----- (inclusive) for the server certs. It cannot include any preamble text and, and must not include a private key.

The "Ingress Controller TLS/SSL Server Private Key File (PEM Format)" must only contain the unencrypted key, and only the header through the footer, with no preamble text.

Both of these files must be readable by the "cloudera-scm" account.

For information on the required entries that must be present in DNS and TLS certificates when not using wildcards, refer to 'No Wildcard DNS/TLS Setup'

Click Continue.

CDEP Deployment from 2024-Apr-22 12:02

## Add Private Cloud Containerized Cluster

- Getting Started
- Cluster Basics
- Specify Hosts
- Select JDK
- Enter Login Credentials
- Install Agents
- Assign Roles
- Configure Docker Repository
- Configure Data Services**
- 10 Configure Databases
- 11 Install Parcels
- 12 Check Prerequisites
- 13 Inspect Cluster
- 14 Install Data Services
- 15 Summary

### Configure Data Services

The Private Cloud Containerized Cluster needs to act as a TLS/SSL Server. By default, Cloudera Manager generates a self-signed certificate and uses it for all communication for example from the browser to the Private Cloud Containerized Cluster using TLS. If you want to specify a custom certificate, place the certificate and the private key in a specific location on the Cloudera Manager server host and specify the paths in the input boxes labelled as Ingress Controller TLS/SSL Server Certificate/Private Key File, below. This certificate must be valid for the application domain and one level underneath it. For example, if your application domain is 'apps.example.com', you must provide a wildcard certificate '\*.apps.example.com' The certificate will be copied to the Private Cloud Containerized Cluster during the installation process.

<b>Data Storage Directory</b>	DOCKER (Service-Wide) <span style="float: right;">ⓘ</span>
defaultDataPath <a href="#">Edit Individual Values</a> <a href="#">defaultDataPath</a>	<input type="text" value="/docker"/>
	ECS (Service-Wide) <span style="float: right;">ⓘ</span>
	<input type="text" value="/ecs/longhorn-storage"/>
<b>Application Domain</b>	ECS (Service-Wide) <span style="float: right;">ⓘ</span>
app_domain <a href="#">app_domain</a>	<input type="text" value="ecsx-1.vpc.cloudera.com"/>
<b>Local Path Storage Directory</b>	ECS (Service-Wide) <span style="float: right;">ⓘ</span>
IsoDataPath <a href="#">IsoDataPath</a>	<input type="text" value="/ecs/local-storage"/>
<b>Number of Replicas</b>	ECS (Service-Wide) <span style="float: right;">ⓘ</span>
longhorn_replication <a href="#">longhorn_replication</a>	<input type="text"/>
<b>Number of replicas</b>	ECS (Service-Wide) <span style="float: right;">ⓘ</span>
target_redundancy <a href="#">target_redundancy</a>	<input type="text" value="2"/>
<b>Use internal alias for registry</b>	<input type="checkbox"/> ECS (Service-Wide) <span style="float: right;">ⓘ</span>
<a href="#">internal_mirror</a>	
<b>Cluster Signing Duration</b>	ECS (Service-Wide) <span style="float: right;">ⓘ</span>
<a href="#">cluster_signing_duration</a>	<input type="text" value="365"/>
<b>Cluster IP Range</b>	ECS (Service-Wide) <span style="float: right;">ⓘ</span>
cluster_cidr <a href="#">cluster_cidr</a>	<input type="text" value="10.42.0.0/16"/>
<b>Service IP Range</b>	ECS (Service-Wide) <span style="float: right;">ⓘ</span>
service_cidr <a href="#">service_cidr</a>	<input type="text" value="10.43.0.0/16"/>

Cancel
← Back
Continue →

12. On the Configure Databases page, click Continue.

CDEP Deployment from 2024-Apr-22 12:02

## Add Private Cloud Containerized Cluster

- Getting Started
- Cluster Basics
- Specify Hosts
- Select JDK
- Enter Login Credentials
- Install Agents
- Assign Roles
- Configure Docker Repository
- Configure Data Services
- 10 Configure Databases**
- 11 Install Parcels
- 12 Check Prerequisites
- 13 Inspect Cluster
- 14 Install Data Services
- 15 Summary


### Configure Databases

CDP Private Cloud Control Plane uses an embedded Database to store configuration and other metadata information for the cluster being managed.

Embedded Database Disk Space (GiB)

[← Back](#) [Continue →](#)

13. On the Install Parcels page, the selected parcel is downloaded to the Cloudera Manager server host, distributed, unpacked, and activated on the ECS cluster hosts. Click Continue.

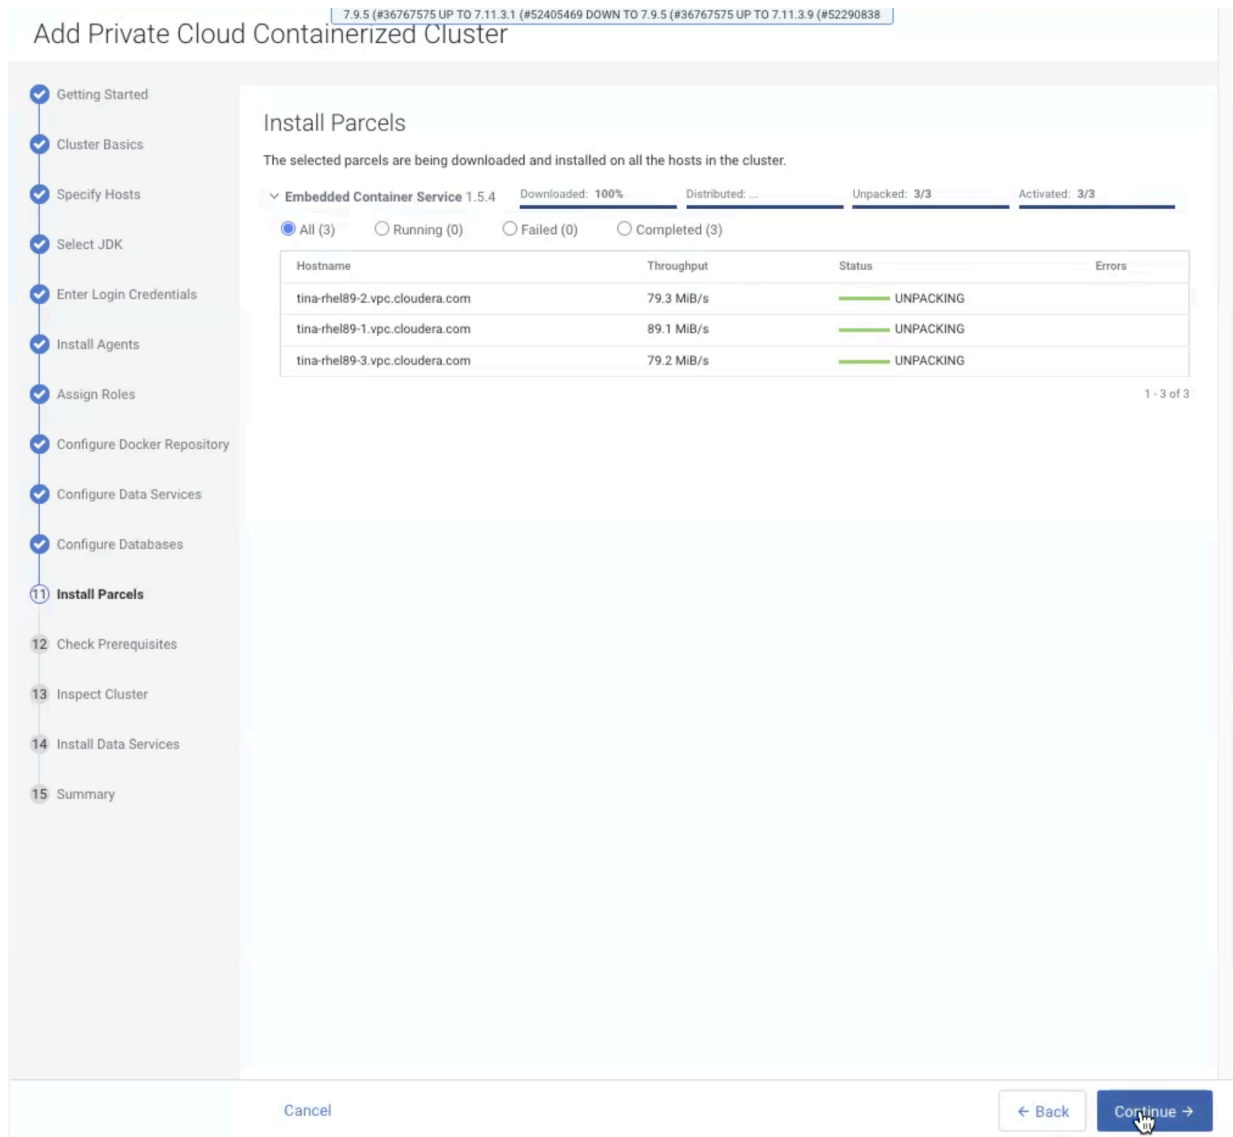

14. If the hosts do not meet the prerequisites, the Check Prerequisites page displays the applicable issues. Correct the issues, then click Run Again. After all of the issues have been resolved, click Continue.

The following prerequisites are checked:

Host Prerequisite Inspection	Validation
StorageInspection	Checks for a minimum of 300 GiB space in the /var/lib and docker data directories respectively. Checks if /var/lib/longhorn or its parent directories are symlinked. If they are, this inspection will fail.
CPUInspection	Checks to make sure the hosts have 16 virtual cores.
PortsInspection	Checks for the availability of ports 443 and 80.

EcsHostDnsInspection	<p>Checks to make sure there are less than 3 nameserver entries in the <code>/etc/resolv.conf</code> file, and checks the connections to the Cloudera Manager cluster and the CDP console. It also checks to see if <code>vault.localhost.localdomain</code>'s ping can be resolved. If not, it is likely that the host <code>/etc/nsswitch.conf</code> file is misconfigured.</p> <p>If this inspection fails:</p> <ul style="list-style-type: none"><li>• Check the <code>/etc/resolv.conf</code> and <code>/etc/nsswitch.conf</code> files and ensure that <code>/etc/resolv.conf</code> does not contain 3 or more nameservers, and that <code>/etc/nsswitch.conf</code> must contain <code>myhostname</code> under the <code>hosts</code> field.</li><li>• Check to see if the connections were resolved correctly. If connection to the CDP console fails, check to see if your DNS wildcard is configured properly.</li></ul>
VersionInspection	Checks that Java is installed and consistent among all ECS hosts.
IPTablesInspection	<p>Checks that if the <code>iptables</code> command exists, rules are cleared. If the <code>iptables</code> command does not exist, <code>iptables</code> gets installed during <code>FirstRun</code> so this inspection passes.</p> <p>If <code>iptables</code> are installed and the rules are not cleared, this inspection will fail.</p> <p>For information on installing <code>iptables</code>, see <a href="#">Install iptables on the new Cloudera Embedded Container Service master nodes</a> on page 46.</p>

EcsCleanupHostInspection

Checks to make sure that the /var/lib/rancher and docker data directories do not contain any files.

CDEP Deployment from 2024-Apr-23 12:43

## Add Private Cloud Containerized Cluster

Getting Started

Cluster Basics

Specify Hosts

Select JDK

Enter Login Credentials

Install Agents

Assign Roles

Configure Docker Repository

Configure Data Services

Configure Databases

Install Parcels

**12 Check Prerequisites**

13 Inspect Cluster

14 Install Data Services

15 Summary

### Check Prerequisites

We are verifying if your hosts meet minimum storage, ports, cpu, and network requirements. The minimum requirements must be met before proceeding.

#### ✖ Host Prerequisites

Error(s) were detected, review the inspector results and correct the problems found. Once corrected, please run the inspections again.

Status **Finished** Last Run a few seconds ago Duration 7.56s

[Show Inspector Results](#)

[Run Again](#)

[More](#)

Status	Description
!	A minimum of 16 cores are required for the hosts in a Private Cloud Containerized Cluster. The following hosts do not satisfy the minimum number of cores: <a href="#">View Details</a>

[Cancel](#)

[← Back](#)

[Continue →](#)



7.9.5 (#36767575 UP TO 7.11.3.1 (#52405469 DOWN TO 7.9.5 (#36767575 UP TO 7.11.3.9 (#52290838

### Add Private Cloud Containerized Cluster

- Getting Started
- Cluster Basics
- Specify Hosts
- Select JDK
- Enter Login Credentials
- Install Agents
- Assign Roles
- Configure Docker Repository
- Configure Data Services
- Configure Databases
- Install Parcels
- 12 Check Prerequisites**
- 13 Inspect Cluster
- 14 Install Data Services
- 15 Summary

#### Check Prerequisites

We are verifying if your hosts meet minimum storage, ports, cpu, and network requirements. The minimum requirements must be met before proceeding.

**Host Prerequisites**

No issues were detected, review the inspector results to see what checks were performed.

Status **Finished** Last Run a few seconds ago Duration 7.95s [Show Inspector Results](#) [Run Again](#) [More](#)

Cancel [← Back](#) [Continue →](#)

15. On the Inspect Cluster page, click Inspect Hosts and Inspect Network Performance to inspect your hosts and network performance. If the Inspect tool displays any issues, you can fix those issues and click Run Again to rerun the inspections. After all of the issues have been resolved, click Continue.

**Note:**

These inspections are more comprehensive host and network tests that you can optionally run. To skip these tests, select the I understand the risks of not running the inspections or the detected issues, let me continue with cluster setup checkbox.

### Add Private Cloud Containerized Cluster

- Getting Started
- Cluster Basics
- Specify Hosts
- Select JDK
- Enter Login Credentials
- Install Agents
- Assign Roles
- Configure Docker Repository
- Configure Data Services
- Configure Databases
- Install Parcels
- Check Prerequisites
- Inspect Cluster**
- 14 Install Data Services
- 15 Summary

#### Inspect Cluster

You have created a new empty cluster. Here are additional inspections Cloudera recommends you to run. For accurate measurements, Cloudera recommends that they are performed sequentially.

✖ **Host Inspector**

Error(s) were detected, review the inspector results and correct the problems found.

Status ● **Finished** Last Run a few seconds ago Duration 5.74s [Show Inspector Results](#) [Run Again](#) [More](#)

Status	Description
❗	Starting with CDH 6, Hue requires Python version 2.7. This warning can be ignored if hosts will not be running CDH 6. The following hosts do not satisfy this requirement: <a href="#">View Details</a> tina-rhel89-[1-3].vpc.cloudera.com
❗	The hosts in a Private Cloud Containerized Cluster that have GPUs are required to have nVidia Drivers and nvidia-container-runtime installed. The following hosts do not satisfy this requirement: <a href="#">View Details</a> tina-rhel89-[1-3].vpc.cloudera.com

✔ **Network Performance Inspections**

[Advanced Options](#)

Status ● **Finished** Last Run a few seconds ago Duration 10.18s [Show Inspector Results](#) [Run Again](#) [More](#)

Tested within **Containerized Cluster 1:**

✔ **Latency Test** [?](#)

Minimum	Average	Maximum
0.09ms	0.13ms	0.17ms

I understand the risks of not running the inspections or the detected issues, let me continue with cluster setup.

[Cancel](#)
[← Back](#)
[Continue →](#)

16. The installation progress is displayed on the Install Data Services page. When the installation is complete, click Continue.

CDEP Deployment from 2024-Apr-23 12:43

## Add Private Cloud Containerized Cluster

- Getting Started
- Cluster Basics
- Specify Hosts
- Select JDK
- Enter Login Credentials
- Install Agents
- Assign Roles
- Configure Docker Repository
- Configure Data Services
- Configure Databases
- Install Parcels
- Check Prerequisites
- Inspect Cluster
- 14 Install Data Services**
- 15 Summary

### Install Data Services

First Run Command

Status ✔ **Finished** Context [Containerized Cluster 1.5.4](#) 📅 Apr 24, 6:46:03 PM ⌚ 17.8m

Finished First Run of the following services successfully: DOCKER, ECS.

✔ **Completed 1 of 1 step(s).**

Show All Steps  Show Only Failed Steps  Show Only Running Steps

✔ Run a set of services for the first time. Successfully completed 1 steps.	Apr 24, 6:46:03 PM	17.8m
✔ Execute 2 steps in sequence Successfully completed 1 steps.	Apr 24, 6:46:03 PM	17.8m
> ✔ Start DOCKER	Apr 24, 6:46:03 PM	47.21s
> ✔ Start ECS	Apr 24, 6:46:51 PM	17m

Cancel ← Back Continue →


17. When the installation is complete, the Summary page appears. Click Launch CDP Private Cloud. You can also click Finish and then access the Data Services cluster from Cloudera Manager.

CDEP Deployment from 2024-Apr-23 12:43

## Add Private Cloud Containerized Cluster

- ✓ Getting Started
- ✓ Cluster Basics
- ✓ Specify Hosts
- ✓ Select JDK
- ✓ Enter Login Credentials
- ✓ Install Agents
- ✓ Assign Roles
- ✓ Configure Docker Repository
- ✓ Configure Data Services
- ✓ Configure Databases
- ✓ Install Parcels
- ✓ Check Prerequisites
- ✓ Inspect Cluster
- ✓ Install Data Services
- 15 Summary

### Summary



Congratulations, you have successfully installed CDP Private Cloud Management Console.

[Launch CDP Private Cloud](#)

Click **Finish** to exit the wizard. You can also access links to CDP Private Cloud Data Services from Home -> Data Services.

The default login is admin/admin.

Cancel
← Back
Finish →

18. When the installation is complete, you can access your Private Cloud Data Services instance from Cloudera Manager. Click Data Services, then click Open Private Cloud Data Services for the applicable Data Services cluster.

If the installation fails, and you see the following error message in the stderr output during the Install Longhorn UI step, retry the installation by clicking the Resume button.

```
++ openssl passwd -stdin -apr1 + echo 'cm-longhorn:$apr1$gp2nrbtq$1KYPGIOQN1
FJ21o5sV6210' + kubectl -n longhorn-system create secret generic basic-auth
--from-file=auth + rm -f auth + kubectl -n longhorn-system apply -f /opt/cloudera/cm-agent/service/ecs/longhorn-ingress.yaml Error from server (Internal
Error): error when creating "/opt/cloudera/cm-agent/service/ecs/longhorn-ingress.yaml":
Internal error occurred: failed calling webhook "validate.nginx.ingress.kubernetes.io": Post "https://rke2-ingress-nginx-controller-admission.kube-system.svc:443/networking/v1/ingresses?timeout=10s": x509: certificate signed by
unknown authority
```

### What to do next

- If you specified a custom certificate, select the ECS cluster in Cloudera Manager, then select Actions > Update Ingress Controller. This command copies the cert.pem and key.pem files from the Cloudera Manager server host to the ECS Management Console host.
- Click Open Private Cloud Data Services to launch your Cloudera Data Services on premises instance.
- Log in using the default username and password admin.
- On the Welcome to CDP Private Cloud page, click Reset Admin Password to change the Local Administrator Account password.
- Set up external authentication using the URL of the LDAP server and a CA certificate of your secure LDAP. Set up external authentication using the URL of the SAML and upload SAML Identity Provider Metadata file. Follow the instructions on the Welcome to CDP Private Cloud page to complete this step.
- Click Test Connection to ensure that you are able to connect to the configured LDAP server.
- [Create your first Virtual Warehouse in the Cloudera Data Warehouse Data Service](#)
- [Provision an AI Workbench in the Cloudera AI Data Service](#)
- [Add a CDE service in the Cloudera Data Engineering Data Service](#)

### Related Information

[No Wildcard DNS/TLS Setup](#)

## ECS Server High Availability

ECS Server High Availability (HA) is not enabled by default – you must enable it after installing Cloudera Embedded Container Service. If you do not wish to enable ECS HA, you can safely ignore this section. If you are enabling Cloudera Embedded Container Service HA, you should review the following notes and supported ECS Server scenarios before proceeding.



#### Note:

- Longhorn replication defaults to two replicas. This can be set only during the installation time. Three or more replicas potentially have performance issues.
- Kubectl delete node <host> permanently removes host from cluster and any data on the host is lost. You must reformat the host before readding to the cluster.
- Single node failure may cause the Control Plane or any other management service to be unavailable. In 1.3.4 or later, it will take several minutes to recover automatically.

### ECS Server scenarios

Clusters with only two servers are not supported. This is only for the temporary transition from a single server cluster to a three server cluster.

#### 1. Three or more servers

- Redundancy requirements:
  - One failure requires three or more servers
  - Two failures require five or more servers
  - For more information see, [Fault Tolerance](#)
- To recover, you must scale-up the ECS Server roles. For more information on adding ECS node to a cluster, see the following section.

## 2. Two servers to one server

- Only after a double failure in a three server cluster
- To recover:
  - Stop the ECS service
  - Remove both the failed ECS server roles and hosts from cluster
  - On the surviving server, run the following command `/opt/cloudera/parcels/ECS/bin/rke2 server --cluster-reset`
  - Start the ECS service

## 3. Single server

- No failure supported

### Enable ECS Server HA Post Cloudera Embedded Container Service Installation

If you want to enable ECS Server for High Availability after installing ECS, then you must proceed with this section. If you do not want to enable Cloudera Embedded Container Service HA, you can safely ignore this section.

As a prerequisite, during the installation, you must have installed Cloudera Embedded Container Service with 1 master (with `app_domain` as Load Balancer URL) + agents. When you are adding more masters, ensure that you add Docker server as well.

### Install iptables on the new Cloudera Embedded Container Service master nodes

You must install iptables on all of the additional Cloudera Embedded Container Service master nodes.

If your Cloudera Embedded Container Service hosts are running on the CentOS 8.4, OEL 8.4, RHEL 8, or RHEL 9 operating systems, you must install iptables on all the Cloudera Embedded Container Service hosts. Run the following command on each additional Cloudera Embedded Container Service master node:

```
yum --setopt=tsflags=noscripts install -y iptables
```

For RHEL 9 only:



**Note:** RHEL 9 has deprecated iptables-nft and must use iptables-legacy. Install iptables if you do not have iptables installed on the hosts.

1. If iptables have been installed, then check their iptables version by using the following command:

```
iptables -V
```

2. This returns the iptables version running in the backend. For example:

```
iptables v1.8.4 (nf_tables)
```

3. If the version provides `nf_tables` instead of `legacy`, you must change the iptables binary to use `iptables-legacy` in the backend. Remove the symlink between `iptables` and `iptables-nft` and then symlink `iptables` to `iptables-legacy` by running the following command:

```
ln -s /usr/sbin/iptables-legacy /usr/sbin/iptables
ln -s /usr/sbin/iptables-legacy-save /usr/sbin/iptables-save
ln -s /usr/sbin/iptables-legacy-restore /usr/sbin/iptables-restore
```

### Adding hosts to the containerized cluster

You must add hosts to the containerized cluster.

1. Log in to Cloudera Manager.
2. Navigate to the ECS service.
3. Click the Actions drop-down.
4. Click the Add Hosts button. The Add Hosts page appears.
5. Select the Add hosts to cluster option.

6. Select the cluster where you want to add the host from the drop-down list. Click Continue.
7. In the Specify Hosts page, provide a list of available hosts or you can add new hosts. You can provide the Fully Qualified Domain Name (FQDN) in the following patterns: You can specify multiple addresses and address ranges by separating them by commas, semicolons, tabs, or blank spaces, or by placing them on separate lines. Use this technique to make more specific searches instead of searching overly wide ranges.  
  
For example, use host[1-3].network.com to specify these hosts: host1.network.com, host2.network.com, host3.network.com.  
  
Click Continue.
8. In the Select Repository page, you must specify the repository location. Choose any one of the following:
  - a. Cloudera Repository (Requires direct internet access on all hosts)
  - b. Custom Repository
9. In the Select JDK page, select any one from the below options:
  - a. Manually manage JDK
  - b. Install a Cloudera-provided version of OpenJDK
  - c. Install a system-provided version of OpenJDK
10. In the Enter Login Credentials page select the SSH Username and provide the password.
11. The Install Agents page appears. Click Continue.
12. In the Install Parcels page, the selected parcels are downloaded and installed on the host cluster. Click Continue.
13. In the Inspect Hosts page, you can inspect your hosts. If the inspect tool displays any issues, you can fix those issues and run the inspect tool again. Click Continue.
14. In the Select Host Template page, select the hosts.
15. The Deploy Client Config page appears. Click Finish.

### Adding Role Instances to Docker Server

You must add role instances to the docker server.

1. Log in to Cloudera Manager.
2. Navigate to the ECS service.
3. Open Docker Server.
4. Click the Actions drop-down.
5. Click the Add Role Instances button.
6. Select the hosts.
7. Click OK.

### Adding Role Instances to Containerised Cluster

You must add the role instances to the containerised cluster.

1. Log in to Cloudera Manager.
2. Navigate to the ECS service.
3. Click the Actions drop-down.
4. Click the Add Role Instances button. The Add Role Instances page appears.
5. In the Assign Roles page, specify the role assignments for your new roles. Click Continue.
6. In the Review Changes page, click Finish.

### Starting Docker Server on Nodes

You must start the Docker server on nodes.

1. Log in to Cloudera Manager.
2. Navigate to the ECS service.
3. Open Docker Server.
4. Click the Actions for Selected drop-down.
5. Click Start. Docker Server starts.

### Starting ECS Server on Nodes

You must start the ECS server on nodes.

1. Log in to Cloudera Manager.
2. Navigate to the ECS service.
3. Click the Instances tab.
4. Select the nodes by clicking the checkbox
5. Click the Actions for Selected drop-down.
6. Click Start. ECS Server starts.

### Rolling Restart of an Cloudera Embedded Container Service

You must perform a rolling restart of Cloudera Embedded Container Service.

1. Log in to Cloudera Manager.
2. Navigate to the ECS service.
3. On the Home > Status tab, click the Actions Menu to the right of the cluster name and select Rolling Restart.
4. Click the Rolling Restart button that appears in the next screen to confirm. On this screen, you can select the services (Docker or /and ECS), Roles (Workers only, Non-workers only, All Roles).



**Note:** Workers only refers to ECS agents, Non-workers only refers to all docker roles and ECS server. The Command Details window shows the progress of rolling restart of a batch of nodes. Here, batch size refers to the number of worker roles that can be restarted in parallel. The Batch size is 1 by default.

5. Click Actions > Unseal Vault .



**Note:** There should always be one ECS server up at all times. Hence, a rolling restart or individually restarting the ECS server is required.

### Checking Nodes and Pods in the UI

You must check the nodes and pods in the UI.

1. Log in to Cloudera Manager.
2. Navigate to the ECS service.
3. Click the Web UI drop-down.
4. Click ECS Web UI. The Kubernetes web UI page opens in a new tab.
5. Check the Nodes and Pods on the Web UI.

### Enable ECS Server HA and promote agents Post Cloudera Embedded Container Service Installation

If you want to enable ECS Server for High Availability after installing Cloudera Embedded Container Service, then you must proceed with this section. If you do not want to enable ECS HA, you can safely ignore this section.

As a prerequisite, during the installation, you must have installed Cloudera Embedded Container Service with 1 master (with app\_domain as Load Balancer URL) + agents. This allows you to promote Agents as masters.

### Enabling ECS Server deployment for High Availability

You can enable ECS Server deployment for High Availability by installing a Load Balancer and promoting the existing ECS Agents to ECS Server. By performing this procedure, you will be able to deploy HA on your existing ECS Server. You must have an Cloudera Embedded Container Service cluster installed and configured with a single ECS Server.

If you have a production quality Cloudera Embedded Container Service cluster, Cloudera recommends that you configure ECS Server High Availability. You can also consider having an ECS Server HA for any non-production Cloudera Embedded Container Service cluster that you expect to be available long-term.

Enabling ECS Server deployment for High Availability involves preparing your cluster, configuring a DNS wildcard entry, adding a Load Balancer into the topology, and promoting ECS Agents to the ECS Server. An ECS High Availability cluster must consist of:

- An odd number of server nodes that will run etcd, the Kubernetes API, and other control plane services. Cloudera recommends a minimum of three ECS Server nodes.




- Two or more agent nodes that are designated to run Cloudera data services.
- A software or hardware Load balancer using TCP mode (non-terminating https).




**Note:** A Load Balancer is required for the ECS Server HA. This documentation uses HAProxy as an example. However, Cloudera recommends that you use your production quality Load Balancer technology from commercial vendors.

Architecture of Cloudera Data Services on premises on a single ECS Server:

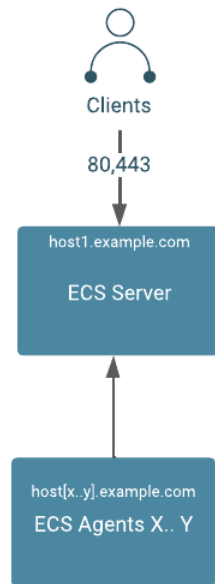

Architecture of Cloudera Data Services on premises with High Availability:

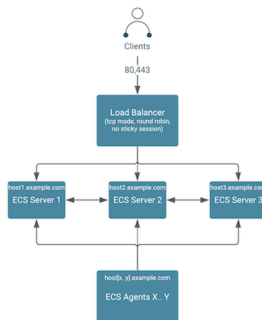

### Preparing the cluster for High Availability:

Review the table to understand the requirements for enabling the High Availability.

1. This process has been tested with a minimum of five Cloudera Embedded Container Service hosts. However, Cloudera recommends six or more hosts.
2. DNS requirements for Cloudera Embedded Container Service High Availability must be fulfilled.

Hostname	Subdomain	Expected Roles	DNS ForwardZone	Reverse Zone PTR
“Wildcard” (hostname = *)	apps.ecs.example.com The string “apps” is required, “ecs” is up to user	Virtual app domain wildcard	“A Record” wildcard (hostname = *), may be a CNAME on certain DNS systems that use text-based config. Resolves to fixed IP of ha_proxy (or VIP of some commercial LB’s)	N
“apps alias”	apps.ecs.example.com	Virtual app domain alias	“CNAME” alias points to A Record of ha_proxy (or VIP). Alternatively, this can be an ARecord with IP of ha_proxy (or VIP)	N/A
HAProxy (or commercial LB)	<domain of your LB>	HA Load Balancer	Depends on vendor/software	
ecs-master1	example.com	ECS Server 1 Docker server	“A Record” resolves to IP of ecs-master1	Y
ecs-master2	example.com	ECS Server 2 Docker server	“A Record” resolves to IP of ecs-master2	Y
ecs-master3	example.com	ECS Server 3 Docker server	“A Record” resolves to IP of ecs-master3	Y
ecs-agentN	example.com	ECS Agent N Docker server N	“A Record” resolves to IP of ecs-agentN	Y

**Note:**

1. The above table uses a consistent subdomain (“example.com”) but this is not mandatory. To support multiple domains, you must follow certain steps to ensure that the domains are forward and reverse resolvable using DNS, from all Base cluster and Cloudera Embedded Container Service cluster hosts (that is through forest/domain level trusts and/or hosts level /etc/resolv.conf config). You must avoid the use of /etc/hosts entries.
2. A predefined wildcard DNS record allows the resolution of \*.apps.<app domain name> to the IP address of the Load Balancer. You cannot proceed further until this is in place.

### High Level steps to enable an Cloudera Embedded Container Service High Availability cluster

Review the high level steps to understand the steps in enabling High Availability.

## Enabling ECS High Availability Cluster

- 1 [Verifying DNS Setup](#)
- 2 [Installing Load Balancer](#)
- 3 [Promoting ECS Agents to ECS Servers](#)
- 4 [Refreshing ECS Cluster](#)



### Note:

1. You must have installed a Cloudera Embedded Container Service with one ECS server and other nodes that are ECS Agents.
2. You must have a DNS wildcard record that has an IP address pointing to your Load Balancer (hostname or VIP). For more information, see the [KB article](#).

### Verifying DNS setup

You must verify the DNS setup to ensure that the app domain DNS hostname points to the Load Balancer.

### Procedure

1. Verify that the app domain DNS hostname has moved from single non-HA ECS Server to the Load Balancer.

Hostname	Expected Roles	DNS
ecs-loadbalancer.example.com	Load Balancer	Resolves to IP of LB host (or VIP). The example uses 10.10.0.99. Both *.apps.ecs.example.com and apps.ecs.example.com resolve to 10.10.0.99.

2. Verify the DNS setup with nslookup.



**Note:** You must verify that a random hostname resolves in the wildcard entry. In this example, Cloudera uses foobar.apps.ecs.example.com as the random name. Both entries should resolve to the same IP address.

For example,

```
$ hosts="apps.ecs.example.com foobar.apps.ecs.example.com"
$ for target in $hosts; do nslookup $target; done

Server: 10.10.xx.xx
Address: 10.10.xx.xx#53

apps.ecs.example.com canonical name = ecs-loadbalancer.example.com.
```

```
Name: ecs-loadbalancer.example.com
Address: 10.10.0.99

Server: 10.10.xx.xx
Address: 10.10.xx.xx#53

Name: foobar.apps.ecs.example.com
Address: 10.10.0.99
```

## Results

DNS setup is verified.

## What to do next

You must now install the Load Balancer.

### Installing Load Balancer

To install the HAProxy Load Balancer, Cloudera uses an example that uses a single instance of HAProxy, configured with round robin balancing and TCP mode. This allows for non-terminating https (https passthrough). The HAProxy service can be configured for High Availability using keepalived.

## Before you begin

You must consult your operating system vendor's documentation for requirements and the install guide for configuring HAProxy with keepalived.

## Procedure

1. To install a HAProxy Load Balancer, you must ssh into the HAProxy host, install, and then configure HAProxy:

```
sudo su -
yum install haproxy -y
cp /etc/haproxy/haproxy.cfg /etc/haproxy/haproxy.cfg.bak
cat > /etc/haproxy/haproxy.cfg << EOF
global
    log 127.0.0.1 local2
    chroot /var/lib/haproxy
    pidfile /var/run/haproxy.pid
    user haproxy
    group haproxy
    daemon
defaults
    mode tcp
    log global
    option tcplog
    option dontlognull
    option redispatch
    retries 3
    maxconn 5000
    timeout connect 5s
    timeout client 50s
    timeout server 50s
listen stats
    bind *:8081
    mode http
    stats enable
    stats refresh 30s
    stats uri /stats
    monitor-uri /healthz
frontend fe_k8s_80
    bind *:80
    default_backend be_k8s_80
```


```

backend be_k8s_80
  balance roundrobin
  mode tcp
  server ecs-server1.example.com 10.10.0.1:80 check
  server ecs-server2.example.com 10.10.0.2:80 check
  server ecs-server3.example.com 10.10.0.3:80 check
frontend fe_k8s_443
  bind *:443
  default_backend be_k8s_443
backend be_k8s_443
  balance roundrobin
  mode tcp
  server ecs-server1.example.com 10.10.0.1:443 check
  server ecs-server2.example.com 10.10.0.2:443 check
  server ecs-server3.example.com 10.10.0.3:443 check
EOF

systemctl enable haproxy
systemctl restart haproxy
systemctl status haproxy
    
```

- You can verify that all the hosts are shown from the HAProxy UI. However, at this point the hosts are not listening to the configured ports.

The screenshot displays the HAProxy configuration and status for several backends. The top section shows the configuration for 'be\_k8s\_80' and 'be\_k8s\_443'. Below that, the status of the servers is shown. The servers are listed as 'ecs-server1', 'ecs-server2', and 'ecs-server3'. The status of each server is shown as 'DOWN' with a '7s DOWN' warning. The 'Status' column shows 'DOWN' and the 'LastChk' column shows 'LACON in 0ms'. The 'Weight' column shows '1' and the 'Act' column shows 'Y'. The 'Bck' column shows '-' and the 'Chk' column shows '1'. The 'Dwn' column shows '1' and the 'Downtime' column shows '7s'. The 'Throttle' column shows '-'. The 'Backend' column shows 'be\_k8s\_80' and 'be\_k8s\_443'. The 'Server' column shows 'ecs-server1', 'ecs-server2', and 'ecs-server3'. The 'Status' column shows 'DOWN' and the 'LastChk' column shows 'LACON in 0ms'. The 'Weight' column shows '1' and the 'Act' column shows 'Y'. The 'Bck' column shows '-' and the 'Chk' column shows '1'. The 'Dwn' column shows '1' and the 'Downtime' column shows '7s'. The 'Throttle' column shows '-'. The 'Backend' column shows 'be\_k8s\_80' and 'be\_k8s\_443'. The 'Server' column shows 'ecs-server1', 'ecs-server2', and 'ecs-server3'.

 **Important:** Since you already have an ECS cluster running, you must alter your DNS wildcard to point to the IP address of the HAProxy server. You cannot change the Application Domain configured through the ECS wizard. So you must ensure that you send all ingress traffic to the HAProxy IP address by making that change in the IP address of your wildcard DNS Record.



**Note:**

- Application Domain (app\_domain property in Cloudera Manager) maps to your wildcard DNS record (For example, app\_domain ecs.example.com maps to your DNS entry \*.apps.ecs.example.com)
- The resolved IP address must be the host IP (or VIP) of your Load Balancer. For more information, see the Verify DNS Step 5 above.

**Results**

Load Balancer is now installed.

**Promoting ECS Agents to ECS Servers**


After installing the Load Balancer, you must reconfigure the existing Cloudera Embedded Container Service Agents to ECS Servers. This process is referred to as promoting the agents to servers. You must promote only one agent at a time.

**About this task**

In this example we will promote the ECS agent on agent1.example.com and then promote the ECS agent on agent2.example.com.


**Procedure**

1. In Cloudera Manager, select the ECS cluster, then click ECS. Stop the ECS agent running on agent1 and then delete the agent.

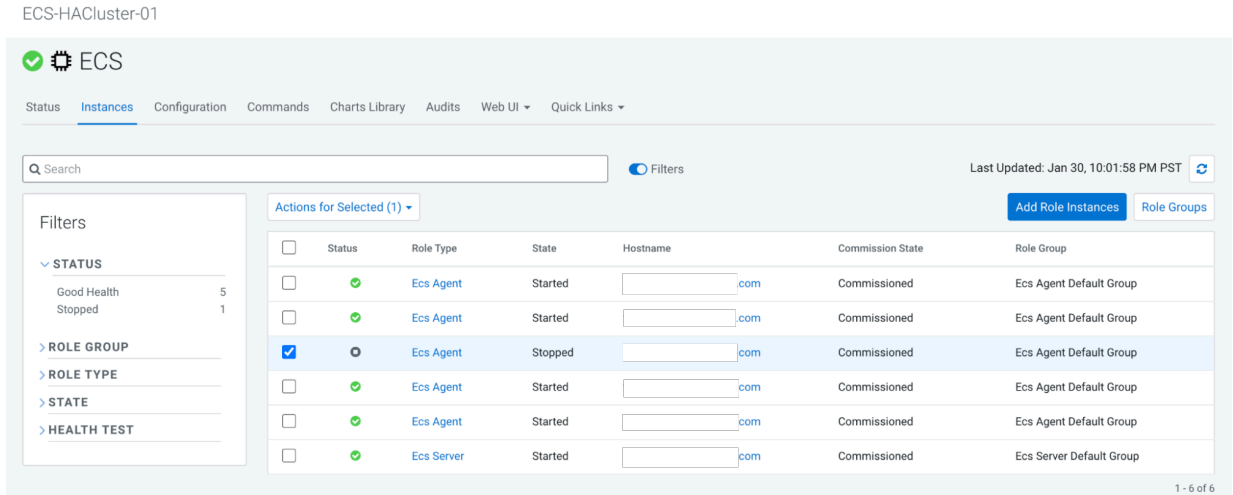

2. In ECS, click Add Role Instances.

Add Role Instances to ECS

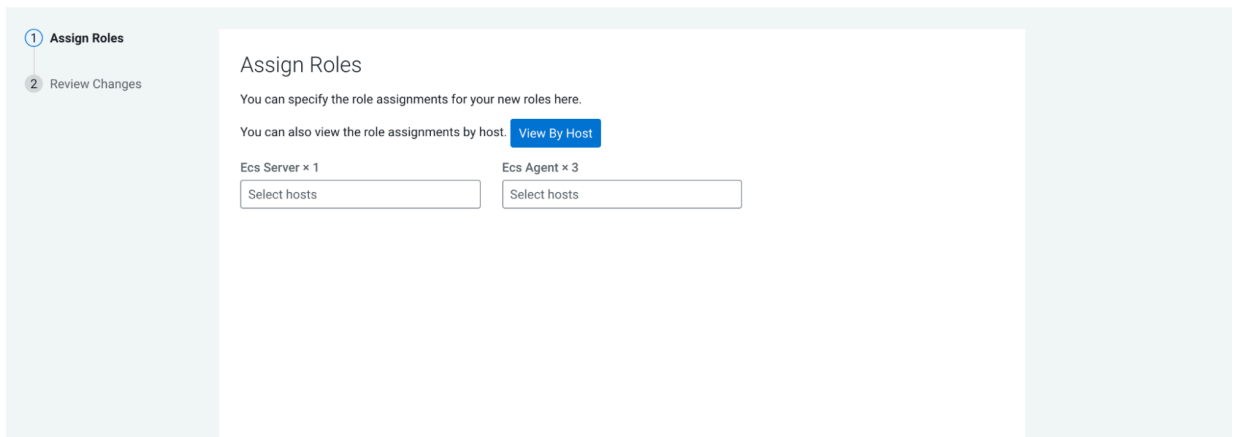

3. Select the available host as an ECS server and then select the Add Role Instances to ECS in the pop-up. Click OK.

2 Hosts Selected

Select hosts for a new or existing role. The host list is filtered to remove hosts that are not valid candidates; these include hosts that are unhealthy, members of other clusters, or have an incompatible version of the software installed on them.

Enter hostnames: host01, IP addresses or rack

<input type="checkbox"/>	Hostname	IP Address	Rack	Cores	Physical Memory	Existing Roles	Added Roles
<input checked="" type="checkbox"/>	clev-ws1.sme-clev.athens.cloudera.com	10.113.207.11	/default	16	62.8 GIB	DS, ES	ES
<input checked="" type="checkbox"/>	[redacted].com	10.113.207.12	/default	16	62.8 GIB	DS	ES
<input type="checkbox"/>	[redacted].com	10.113.207.13	/default	16	62.8 GIB	DS	ES
<input type="checkbox"/>	[redacted].com	10.113.207.14	/default	16	62.8 GIB	DS, EA	
<input type="checkbox"/>	[redacted].com	10.113.207.18	/default	16	62.8 GIB	DS, EA	
<input type="checkbox"/>	[redacted].com	10.113.207.19	/default	16	62.8 GIB	DS, EA	

Cancel OK

### Add Role Instances to ECS

1 Assign Roles

2 Review Changes

### Assign Roles

You can specify the role assignments for your new roles here.

You can also view the role assignments by host: [View By Host](#)

Ecs Server × (1 + 2 New)

Ecs Agent × 3

4. Click Continue.

Experiences Cluster 1

ECS Actions

Status **Instances** Configuration Commands Charts Library Web UI Quick Links

Search Filters Last Updated: Jan 6, 3:58:16 AM UTC

Filters

- STATUS
  - Good Health 4
  - Stopped 2
- ROLE GROUP
- ROLE TYPE
- STATE
- HEALTH TEST

Actions for Selected

<input type="checkbox"/>	Status	Role Type	State	Hostname	Commission State	Role Group
<input type="checkbox"/>	Good Health	Ecs Agent	Started	[redacted].com	Commissioned	Ecs Agent Default Group
<input type="checkbox"/>	Good Health	Ecs Agent	Started	[redacted].com	Commissioned	Ecs Agent Default Group
<input type="checkbox"/>	Good Health	Ecs Agent	Started	[redacted].com	Commissioned	Ecs Agent Default Group
<input type="checkbox"/>	Stopped	Ecs Server	Stopped	[redacted].com	Commissioned	Ecs Server Default Group
<input type="checkbox"/>	Stopped	Ecs Server	Stopped	[redacted].com	Commissioned	Ecs Server Default Group
<input type="checkbox"/>	Good Health	Ecs Server	Started	[redacted].com	Commissioned	Ecs Server Default Group

Add Role Instances Role Groups

5. Start the new ECS server from the ECS Instances view. For example, start the ECS server on agent1.

6. Confirm the node's status from the Web UI or the command line by running the following command:

```
sudo /var/lib/rancher/rke2/bin/kubectl --kubeconfig=/etc/rancher/rke2/rk
e2.yaml get nodes
```



**Note:** Do not proceed until the node status is Ready. This may take several minutes.

Name	Labels	Ready	CPU requests (cores)	CPU limits (cores)	Memory requests (bytes)	Memory limits (bytes)	Pods	Created ↑
[redacted].com	beta.kubernetes.io/arch: amd64 beta.kubernetes.io/os: linux ecs_role: master	True	4.54 (28.38%)	0.00m (0.00%)	0.00 (0.00%)	0.00 (0.00%)	12 (10.91%)	48 seconds ago

### What to do next

When agent1 is ready, you can promote agent2. To promote agent2, perform steps 1-8 again using agent2.example.com.




### Refreshing Cloudera Embedded Container Service

After all the ECS Agents are promoted to ECS Servers, you must log in to Cloudera Manager and refresh the ECS cluster.



### Procedure

1. Navigate to ECS Cluster >> ECS view >> Actions >> Refresh ECS. This sets the ingress proxy so that all three servers are eligible to process incoming commands.

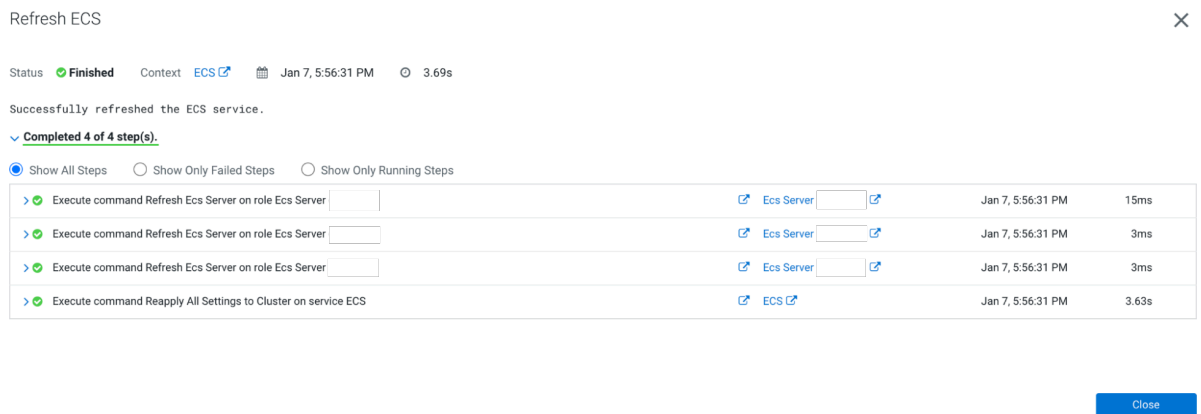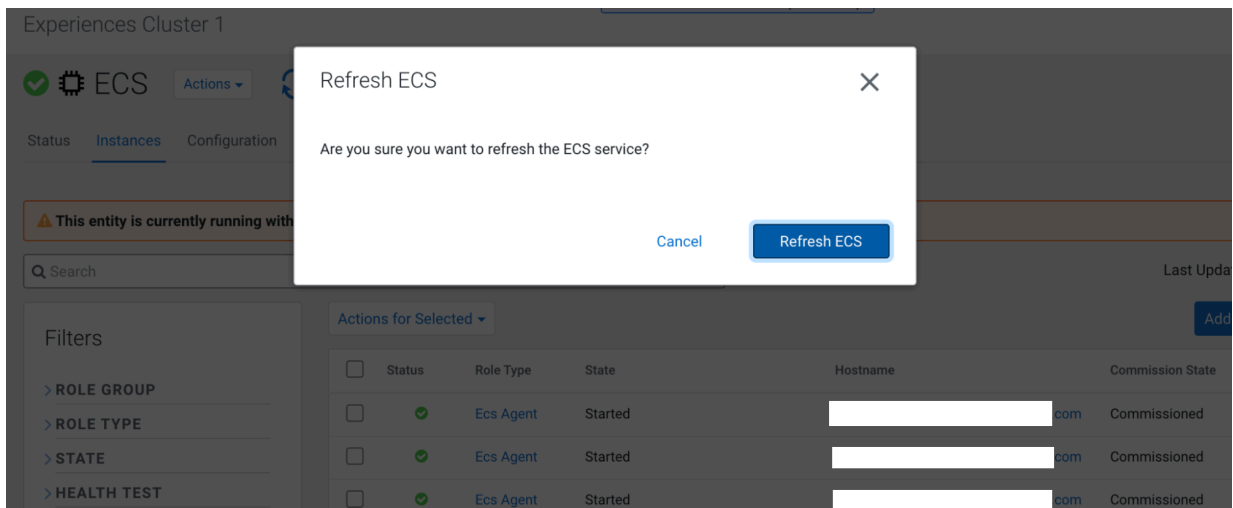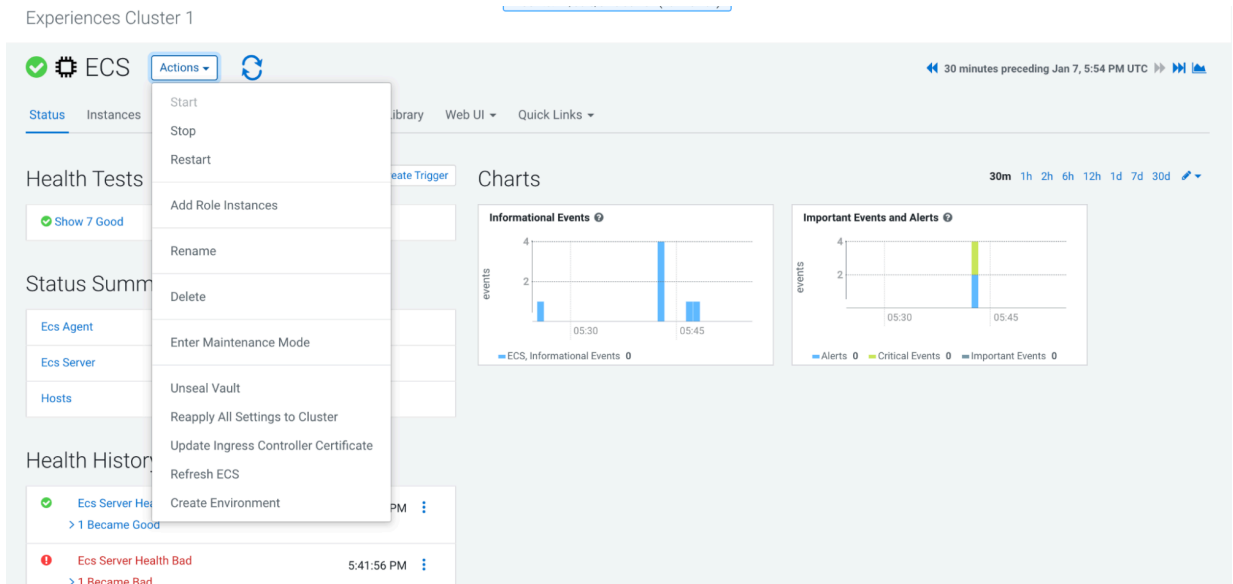

2. Confirm that all backends of HAProxy display the status UP. This may take several minutes.

Queue		Session rate			Sessions				Bytes		Denied		Errors		Warnings		Server													
Cur	Max	Limit	Cur	Max	Limit	Cur	Max	Limit	Total	LbTot	Last	In	Out	Req	Resp	Req	Conn	Resp	Retr	Redis	Status	LastChk	Wght	Act	Bck	Chk	Dwn	Dwntme	Thrtle	
Frontend		1	2	-	1	2	5 000	144				132 493	3 570 185	0	0	0						OPEN								
Backend		0	0	0	1	0	1	500	143	0	0s	132 493	3 570 185	0	0	0						1h12m UP			0	0	0	0		

Queue		Session rate			Sessions				Bytes		Denied		Errors		Warnings		Server													
Cur	Max	Limit	Cur	Max	Limit	Cur	Max	Limit	Total	LbTot	Last	In	Out	Req	Resp	Req	Conn	Resp	Retr	Redis	Status	LastChk	Wght	Act	Bck	Chk	Dwn	Dwntme	Thrtle	
Frontend		0	0	-	0	0	5 000	144				0	0	0	0	0						OPEN								

Queue		Session rate			Sessions				Bytes		Denied		Errors		Warnings		Server													
Cur	Max	Limit	Cur	Max	Limit	Cur	Max	Limit	Total	LbTot	Last	In	Out	Req	Resp	Req	Conn	Resp	Retr	Redis	Status	LastChk	Wght	Act	Bck	Chk	Dwn	Dwntme	Thrtle	
com		0	0	-	0	0	0	0	0	0	-	0	0	0	0	0	0	0	0	0	0	32m23s UP	L4OK in 0ms	1	Y	-	4	2	36m46s	-
com		0	0	-	0	0	0	0	0	0	-	0	0	0	0	0	0	0	0	0	0	15m44s UP	L4OK in 0ms	1	Y	-	1	1	56m07s	-
com		0	0	-	0	0	0	0	0	0	-	0	0	0	0	0	0	0	0	0	0	15m44s UP	L4OK in 0ms	1	Y	-	1	1	56m06s	-
Backend		0	0	0	0	0	0	500	0	0	0s	0	0	0	0	0	0	0	0	0	0	32m23s UP		3	3	0	2	36m45s		


  

Queue		Session rate			Sessions				Bytes		Denied		Errors		Warnings		Server													
Cur	Max	Limit	Cur	Max	Limit	Cur	Max	Limit	Total	LbTot	Last	In	Out	Req	Resp	Req	Conn	Resp	Retr	Redis	Status	LastChk	Wght	Act	Bck	Chk	Dwn	Dwntme	Thrtle	
Frontend		0	24	-	3	8	5 000	493				901 947	2 478 032	0	0	0						OPEN								

Queue		Session rate			Sessions				Bytes		Denied		Errors		Warnings		Server													
Cur	Max	Limit	Cur	Max	Limit	Cur	Max	Limit	Total	LbTot	Last	In	Out	Req	Resp	Req	Conn	Resp	Retr	Redis	Status	LastChk	Wght	Act	Bck	Chk	Dwn	Dwntme	Thrtle	
com		0	0	-	0	8	1	4	261	261	47s	430 509	1 502 801	0	0	0	0	0	0	0	0	32m24s UP	L4OK in 0ms	1	Y	-	4	2	36m42s	-
com		0	0	-	0	8	1	3	114	114	42s	233 867	478 225	0	0	0	0	0	0	0	0	15m43s UP	L4OK in 0ms	1	Y	-	1	1	56m07s	-
com		0	0	-	0	8	1	3	114	114	42s	237 571	497 006	0	0	0	0	0	0	0	0	15m45s UP	L4OK in 0ms	1	Y	-	1	1	56m04s	-
Backend		0	0	0	24	3	8	500	493	489	42s	901 947	2 478 032	0	0	4	0	0	0	0	0	32m24s UP		3	3	0	2	36m41s		

3. Confirm that all pods are green in the ECS webUI >> (All Namespaces) >> Workloads.

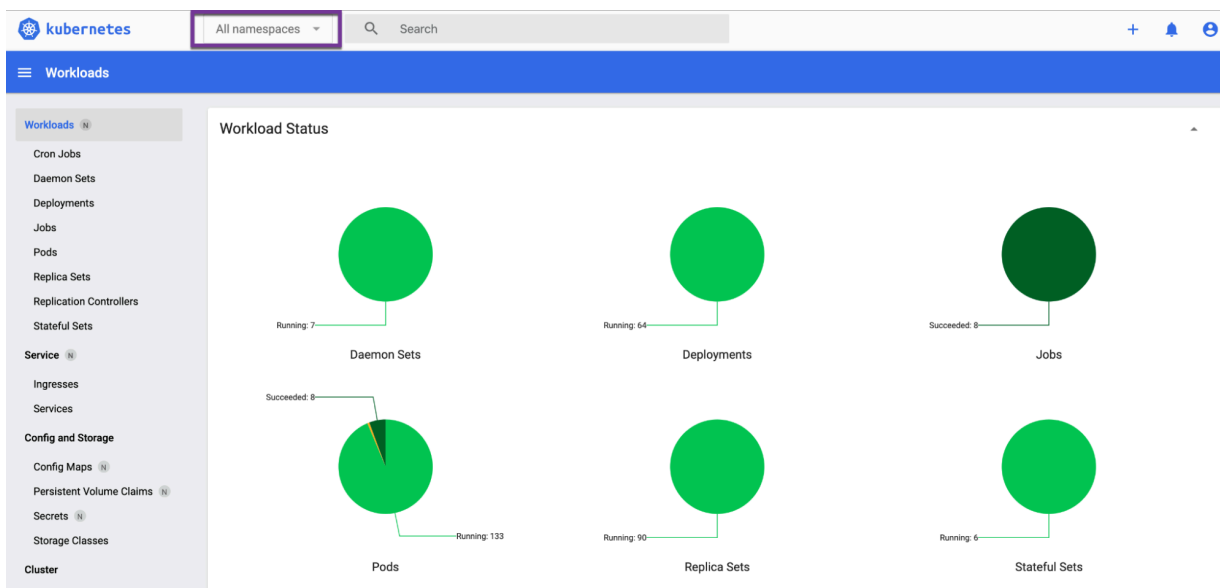

4. Confirm that there are no alerts in the ECS service.

ECS1

The screenshot displays the ECS service interface. At the top, there is a green checkmark icon, a gear icon, and the text 'ECS'. To the right is an 'Actions' dropdown menu. Below this is a navigation bar with tabs for 'Status' (underlined), 'Instances', 'Configuration', 'Commands' (with a play button and '1'), and 'Charts Library'. The main content area is titled 'Health Tests' and includes a 'Create Trigger' button. A summary box shows a green checkmark and the text 'Show 7 Good'. Below this is a 'Status Summary' section with a table:

Ecs Agent	✓ 1 Good Health
Ecs Server	✓ 3 Good Health
Hosts	✓ 4 Good Health

### Results

High Availability is now deployed on your ECS cluster.

## Manually uninstalling ECS from a cluster

You can manually uninstall ECS from your cluster.

### Before you begin

Before performing this procedure, ensure that you have activated the ECS parcel on the cluster hosts.

During the installation time of ECS, the directory for Longhorn and the LSO are decided by Cloudera Manager and defaults to /ecs.

<b>Data Storage Directory</b> defaultDataPath <a href="#">Edit Individual Values</a> defaultDataPath	DOCKER (Service-Wide) ⓘ <input type="text" value="/docker"/> ECS (Service-Wide) ⓘ <input type="text" value="/ecs/longhorn-storage"/>
<b>Application Domain</b> app_domain app_domain	ECS (Service-Wide) ⓘ <input type="text" value="cloudera.com"/>
<b>Local Path Storage Directory</b> IsoDataPath IsoDataPath	ECS (Service-Wide) ⓘ <input type="text" value="/ecs/local-storage"/>

## Procedure


1. On each host in the cluster:
  - a) `/opt/cloudera/parcels/ECS/docker/docker container stop registry`
  - b) `/opt/cloudera/parcels/ECS/docker/docker container rm -v registry`
  - c) `/opt/cloudera/parcels/ECS/docker/docker image rm registry:2`
2. Stop the ECS cluster in Cloudera Manager
3. On each host:
  - a) `cd /opt/cloudera/parcels/ECS/bin`
  - b) `./rke2-killall.sh` # usually 2 times is sufficient
  - c) Use `umount` to unmount all NFS disks.
  - d) `./rke2-uninstall.sh`
  - e) `rm -rf /ecs/*` # assumes the default defaultDataPath and IsoDataPath
  - f) `rm -rf /var/lib/docker_server/*` # deletes the auth and certs
  - g) `rm -rf /etc/docker/certs.d/*` # delete the ca.crt
  - h) `rm -rf /docker` # assumes the default defaultDataPath for docker
  - i) `rm -rf /var/lib/rancher/*`

4. Delete the ECS cluster in Cloudera Manager.


a)

In Cloudera Manager, navigate to CDP Private Cloud Data Services and click . Click Uninstall.

## CDP Private Cloud Data Services

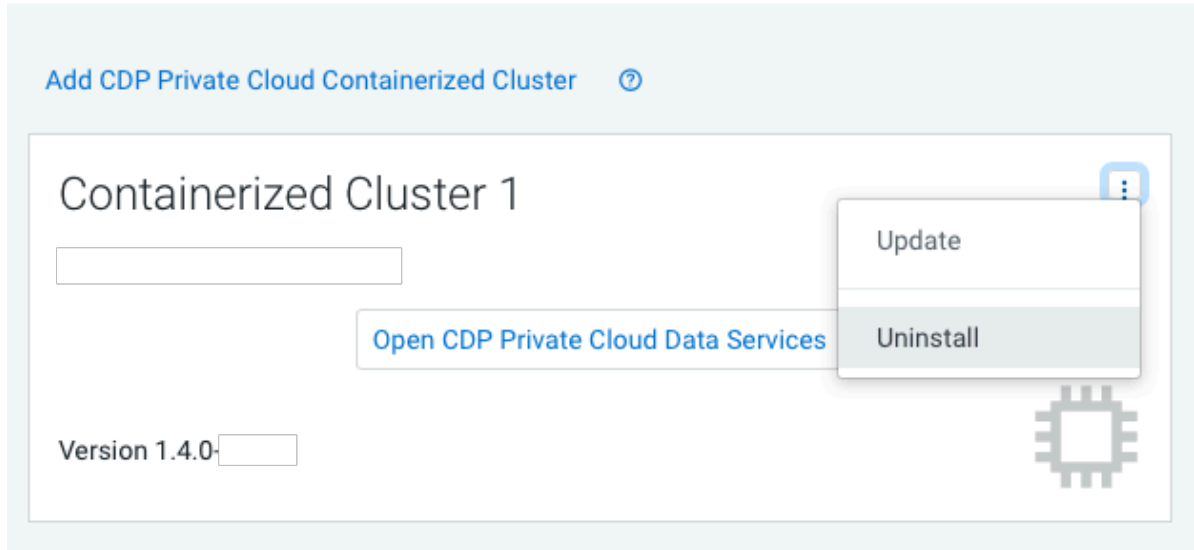

b) The Delete Cluster wizard appears. Click Delete.

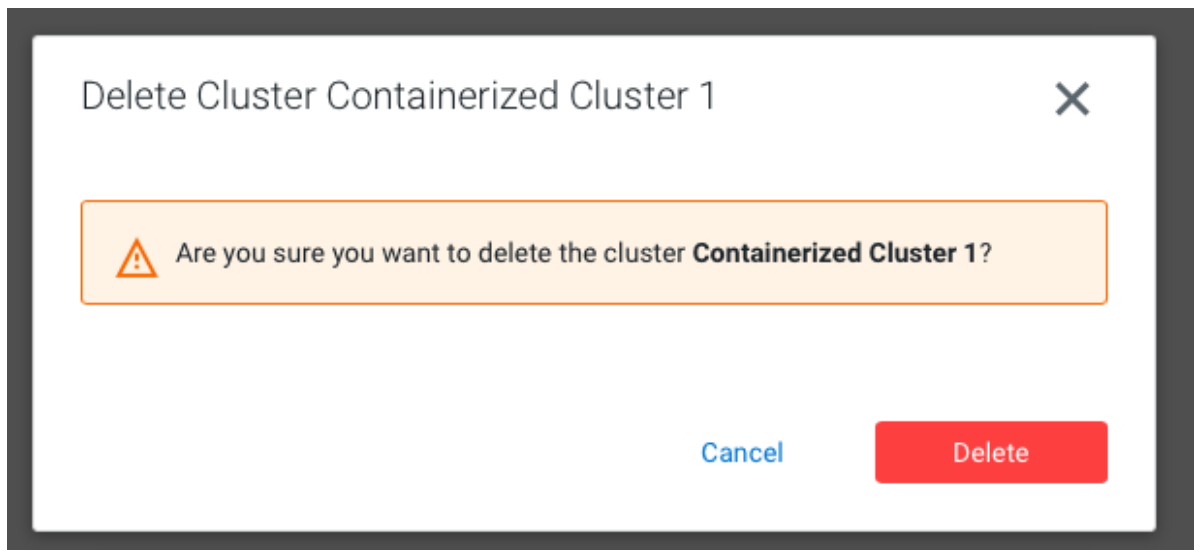

5. Clean IPTables on each host:

```
echo "Reset iptables to ACCEPT all, then flush and delete all other chains";
declare -A chains=( [filter]=INPUT:FORWARD:OUTPUT
[raw]=PREROUTING:OUTPUT [mangle]=PREROUTING:INPUT:FORWARD:OUTPUT:POSTROUTING
[security]=INPUT:FORWARD:OUTPUT [nat]=PREROUTING:INPUT:OUTPUT:POSTROUTING );
for table in "${!chains[@]}"; do
echo "${chains[$table]}" | tr : $"\n" | while IFS=
read -r;
do sudo iptables -t "$table" -P "$REPLY" ACCEPT
done
```

```
sudo iptables -t "$table" -F
sudo iptables -t "$table" -X
done
```



**Note:** Alternatively, an experimental script is available. This script combines steps three through five. The script is available here: <https://github.com/cloudera-labs/snippets/blob/main/private-cloud/kill-2-rke.sh> script

6. Reboot the host(s).
7. Before you install ECS again, ensure that the IP tables list is empty by executing the following command: `#iptables -s -L`